


DASH – Recessed (R)




TECHNICAL DATA

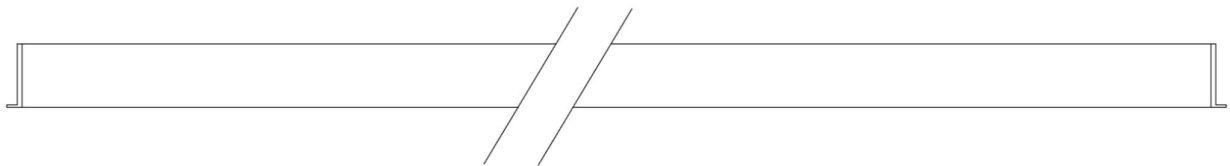


570/1130/1410/1690/2250


DASH-R-4




DASH-R-6

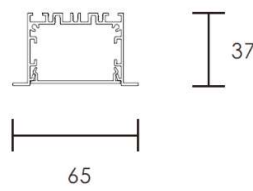


DASH-R-9

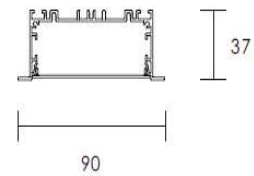


Connector Options




180 deg Straight



L- Shape



T - Shape



X - Shape

TECHNICAL DATA

Length (mm)	Wattage	Luminous Flux			
		2700K	3000K	4000K	6000K
570	18W	1740	1770	1800	1830
1130	36W	3540	3570	3600	3630
1410	45W	4440	4470	4500	4530
1690	54W	5340	5370	5400	5430
2250	72W	7140	7170	7200	7230

<i>Luminous Efficacy</i>	> 90lm/W
<i>SDCM</i>	<3
<i>CRI</i>	>83/93
<i>Beam Angle</i>	120°
<i>Power Factor</i>	>0.95
<i>Working Voltage</i>	220-240V AC, 50/60Hz
<i>LED Driver</i>	Integral
<i>Control</i>	Switched / 0-10V / DALI / Tunable White
<i>Body Material</i>	Extruded Aluminium
<i>Diffuser</i>	Opal Polycarbonate
<i>Cut Out (mm)</i>	DASH-R-4 – 42mm DASH -R-6 – 60mm DASH -R-9 - 85mm
<i>IP Rating</i>	IP40
<i>Working Temperature</i>	-20°C to 40°C
<i>Rated Life</i>	50,000Hrs (L70)

ORDER INFORMATION

Product Code	AA	BB	X	YY
BLU-DASH-R-4	57	18W	8 - CRI 83+	27 -2700K
BLU-DASH-R-6	113	36W	9 - CRI 93+	30 -3000K
BLU-DASH-R-9	141	45W		40 -4000K
	169	54W		60 -6000K
	225	72W		

Example: BLU-DASH-R-4-57-18W-827