


DASH Series


Continuous Linear Light





DASH – Surface (S)

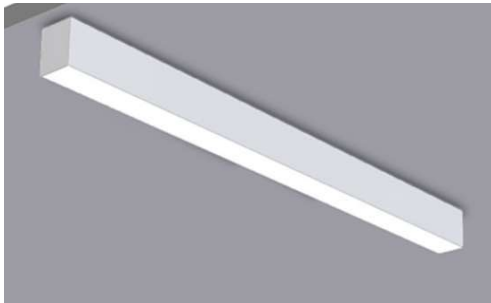



DASH – Recessed (R)

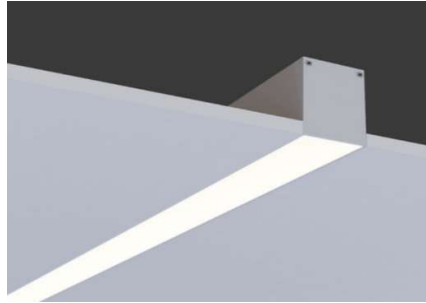



DASH – Suspended (SP)

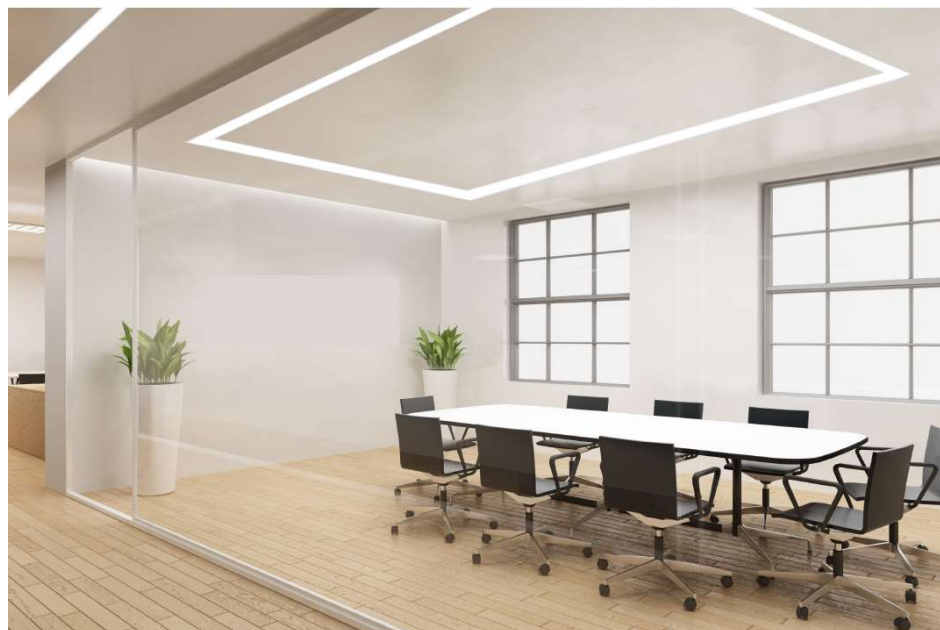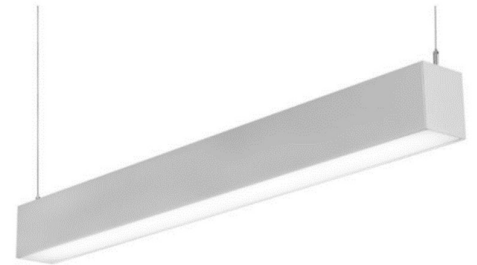


TECHNICAL DATA

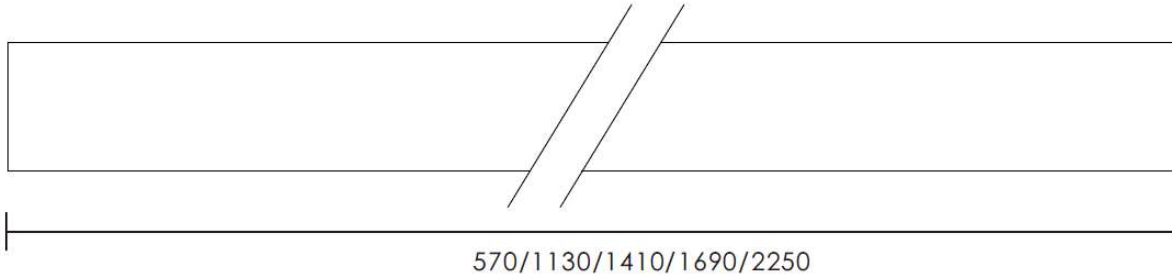



DASH-3





DASH-5



DASH-6




DASH-7

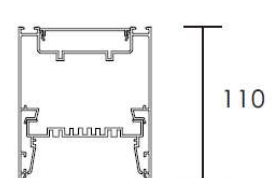


DASH-10


Mounting Options

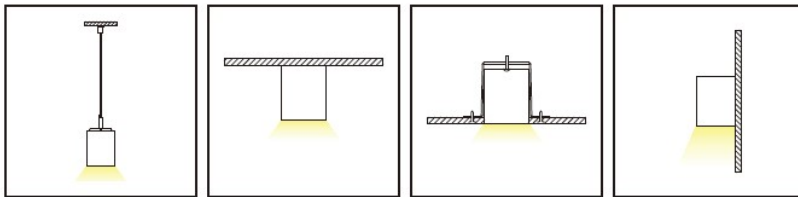


Connector Options




180 deg Straight



L- Shape



T - Shape






X - Shape

TECHNICAL DATA

Length (mm)	Wattage	Luminuous Flux			
		2700K	3000K	4000K	6000K
570	18W	1740	1770	1800	1830
1130	36W	3540	3570	3600	3630
1410	45W	4440	4470	4500	4530
1690	54W	5340	5370	5400	5430
2250	72W	7140	7170	7200	7230

<i>Luminous Efficacy</i>	> 90lm/W
<i>SDCM</i>	<3
<i>CRI</i>	>83/93
<i>Beam Angle</i>	120°
<i>Power Factor</i>	>0.95
<i>Working Voltage</i>	220-240V AC, 50/60Hz
<i>LED Driver</i>	Integral
<i>Control</i>	Switched / 0-10V / DALI / Tunable White
<i>Body Material</i>	Extruded Aluminium
<i>Diffuser</i>	Opal Polycarbonate
<i>IP Rating</i>	IP40
<i>Working Temperature</i>	-20°C to 40°C
<i>Rated Life</i>	50,000Hrs (L70)

ACCESSORIES

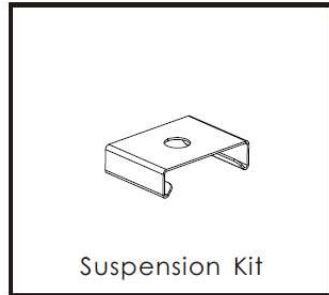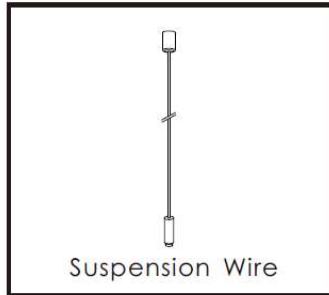

ORDER INFORMATION

Product Code	Width	Length	Wattage	X	YY	Z
BLU-DASH	3 – 35mm	57 – 570mm	18W	8 - CRI 83+	27 -2700K	S - Surface
	5 – 50mm	113 – 1130mm	36W	9 - CRI 93+	30 -3000K	R - Recessed
	6 – 65mm	141 – 1410mm	45W		40 -4000K	SP - Suspended
	7 – 75mm	169 – 1690mm	54W		60 -6000K	
	10 – 100mm	225 – 2250mm	72W			

Example: BLU-DASH-3-57-18W-827-S

Specification subject to change without notice