



TECHNICAL DATA

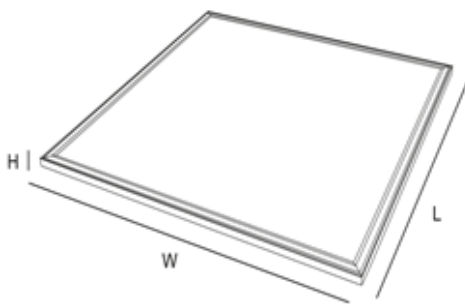

Product Code	Wattage	Luminous Flux				Size
		2700K	3000K	4000K	6000K	L x W x H (mm)
BLU-PLANE-S-2X2	28W	2650	2695	2750	2800	595 x 595 x 10
BLU-PLANE-S-2X2	36W	3415	3480	3550	3600	595 x 595 x 10
BLU-PLANE-S-2X2	42W	3975	4050	4125	4200	595 x 595 x 10
BLU-PLANE-S-1X4	28W	2650	2695	2750	2800	1195 x 295 x 10
BLU-PLANE-S-1X4	36W	3415	3480	3550	3600	1195 x 295 x 10
BLU-PLANE-S-1X4	42W	3975	4050	4125	4200	1195 x 295 x 10
BLU-PLANE-S-2X4	28W	2650	2695	2750	2800	1195 x 595 x 10
BLU-PLANE-S-2X4	36W	3415	3480	3550	3600	1195 x 595 x 10
BLU-PLANE-S-2X4	42W	3975	4050	4125	4200	1195 x 595 x 10
BLU-PLANE-S-2X4	48W	4575	4650	4725	4800	1195 x 595 x 10
BLU-PLANE-S-2X4	55W	5275	5350	5425	5500	1195 x 595 x 10

Luminous Efficacy

SDCM

CRI

Beam Angle

Working Voltage

LED Driver

Control

Body Material

Diffuser

IP Rating

Working Temperature

Rated Life

>90lm/W
<3
>83/93
120°
36 VDC
Remote
Switched / 1-10V / DALI
Extruded Aluminium
PS LGP with PS diffuser
IP44
-20°C to 40°C
50,000Hrs (L70)

ORDER INFORMATION

Product Code	X	YY	ZZ
BLU-PLANE-S-2X2-28W/36W/42W	8 - CRI 83+	27 -2700K	IP44
BLU-PLANE-S-1X4-28W/36W/42W	9 - CRI 93+	30 -3000K	
BLU-PLANE-S-2X4-		40 -4000K	
28W/36W/42W/48W/55W		60 -6000K	

Example: BLU-PLANE-S-2X2-36W-827-IP44

Specification subject to change without notice