

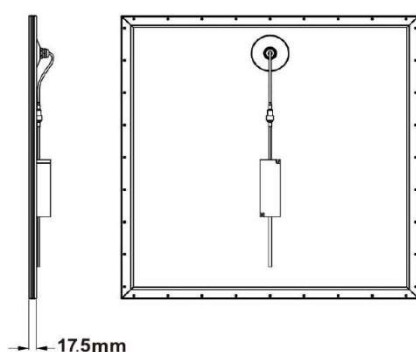


# Plane 2X2

Recessed Light

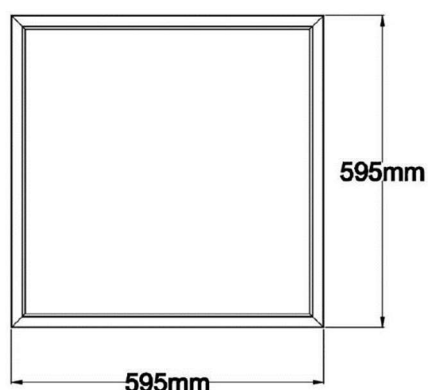

## TECHNICAL DATA

|                     |                         |        |        |
|---------------------|-------------------------|--------|--------|
| Product Code        | BLU-PLANE-2X2           |        |        |
| Wattage             | 28W / 36W / 42W         |        |        |
| Luminous Flux       | 28W                     | 36W    | 42W    |
|                     | 2700K – 2660lm          | 3420lm | 3990lm |
|                     | 3000K – 2720lm          | 3480lm | 4170m  |
|                     | 4000K – 2780lm          | 3550lm | 4350lm |
|                     | 6000K – 2480lm          | 3610lm | 4510lm |
| Luminous Efficacy   | >90lm/W                 |        |        |
| SDCM                | <3                      |        |        |
| CRI                 | >85                     |        |        |
| Beam Angle          | 120°                    |        |        |
| Working Voltage     | 36 VDC                  |        |        |
| LED Driver          | Remote                  |        |        |
| Control             | Switched / 1-10V / DALI |        |        |
| Body Material       | Extruded Aluminium      |        |        |
| Optics              | PS LGP with PS diffuser |        |        |
| IP Rating           | IP65                    |        |        |
| Working Temperature | -20°C to 50°C           |        |        |
| Rated Life          | 50,000Hrs (L70)         |        |        |

## ORDER INFORMATION

| Product Code      | X           | YY         | ZZ            |
|-------------------|-------------|------------|---------------|
| BLU-PLANE-2X2-28W | 8 - CRI 85+ | 27 - 2700K | 120 - 120 Deg |
| BLU-PLANE-2X2-36W |             | 30 - 3000K |               |
| BLU-PLANE-2X2-42W |             | 40 - 4000K |               |
|                   |             | 60 - 6000K |               |

Example: BLU-PLANE-2X2-28W-827-IP65

Specification subject to change without notice