
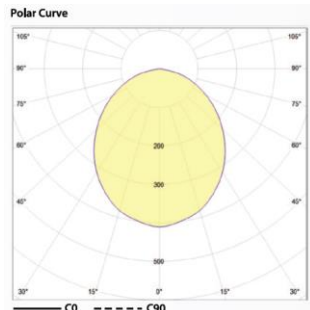


PHOBOS 22 & 28

Ceiling / Wall Mounted Light

Phobos 22 & 28

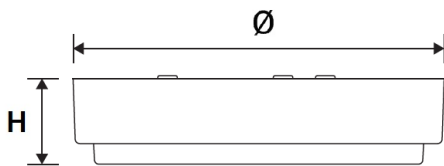

TECHNICAL DATA

Code	Wattage	Luminous Flux				Size Ø x H (mm)
		2700K	3000K	4000K	6000K	
PHOB-22	8W	600	615	630	645	220x60
PHOB-22	12W	900	920	940	960	220x60
PHOB-22	15W	1125	1150	1175	1200	220x60
PHOB-28	15W	1125	1150	1175	1200	280x60
PHOB-28	18W	1350	1380	1405	1435	280x60
PHOB-28	24W	1800	1840	1880	1920	280x60

Luminous Efficacy >75lm/W

SDCM <3

CRI >83/93

Beam Angle 120°

Power Factor >0.95

Working Voltage 220-240 VAC, 50/60Hz

LED Driver Integral

Control Switched

Body Material Polycarbonate

Diffuser Polycarbonate

IP Rating IP44

Working Temperature -20°C to 50°C

Rated Life 50,000Hrs (L70)

ORDER INFORMATION

Product Code	Watt	X	YY	ZZ
BLU-PHOB-22	8W	8 - CRI 83+	27 -2700K	IP44
BLU-PHOB-28	12W	9 - CRI 93+	30 -3000K	
	15W		40 -4000K	
	18W		60 -6000K	
	24W			

Example: BLU-PHOB-22-8W-827-IP44

Specification subject to change without notice