




TECHNICAL DATA

Code	Wattage	Luminous Flux				Size (Ø X H)mm
		2700K	3000K	4000K	6000K	
PHOB-26F	15W	1220	1250	1280	1320	260 X 44
PHOB-30F	18W	1440	1470	1500	1530	300 X 44
PHOB-36F	28W	2240	2270	2300	2360	360 X 47

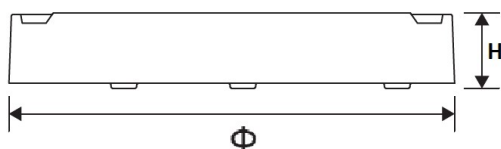

Luminous Efficacy	>80lm/W
SDCM	<3
CRI	>83/93
Beam Angle	120°
Power Factor	>0.95
Working Voltage	220-240 VAC, 50/60Hz
LED Driver	Integral
Control	Switched
Body Material	Polycarbonate
Diffuser	Polycarbonate
IP Rating	IP65
Working Temperature	-20°C to 50°C
Rated Life	50,000Hrs (L70)



ORDER INFORMATION

Product Code	X	YY	ZZ
BLU-PHOB-26F-15W	8 - CRI 83+	27 -2700K	IP65 - IP65
BLU-PHOB-30F-18W	9 - CRI 93+	30 -3000K	
BLU-PHOB-36F-28W		40 -4000K	
		60 -6000K	

Available colors:



Example: BLU-PHOB-30F-18W-827-IP65

Specification subject to change without notice