


WHIRL PRO

Ceiling and Pendant Light



WHIRL PRO- C

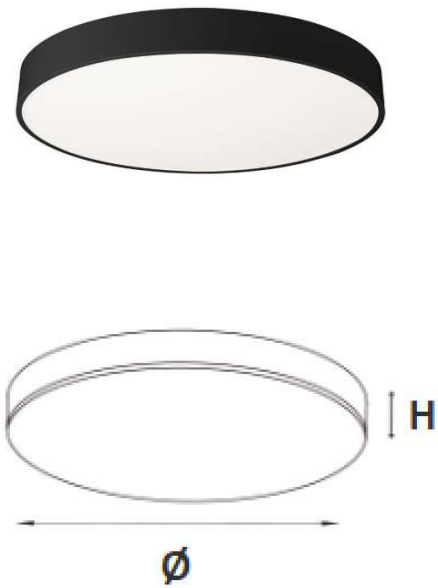

WHIRL PRO- S



TECHNICAL DATA

Code	Wattage	Luminous Flux				Size (Ø X H)mm
		2700K	3000K	4000K	5000K	
WHLP-C17	15	1290	1340	1390	1440	175 X 53
WHLP-C21	20	1720	1770	1820	1870	210 X 53
WHLP-C25	30	2580	2630	2680	2730	250 X 53
WHLP-C35	30	3150	3220	3290	3360	350 X 65
WHLP-C40	40	4080	4150	4220	4290	400 X 65
WHLP-C50	50	5250	5320	5390	5460	500 X 65
WHLP-C60	60	6900	6970	7040	7110	600 X 65
WHLP-C80	80	9040	9110	9180	9250	800 X 79
WHLP-C100	100	11700	11770	11840	11910	1000 X 79
WHLP-C120	120	13200	13270	13340	13410	1200 X 79
WHLP-S35	30	3150	3220	3290	3360	350 X 65
WHLP-S40	40	4080	4150	4220	4290	400 X 65
WHLP-S50	50	5250	5320	5390	5460	500 X 65
WHLP-S60	60	6900	6970	7040	7110	600 X 65
WHLP-S80	80	9040	9110	9180	9250	800 X 79
WHLP-S100	100	11700	11770	11840	11910	1000 X 79
WHLP-S120	120	13200	13270	13340	13410	1200 X 79

<i>SDCM</i>	<3
<i>CRI</i>	>83/93
<i>Beam Angle</i>	120°
<i>Working Voltage</i>	220-240V AC, 50/60Hz
<i>LED Driver</i>	Integral
<i>Control</i>	Switched / 1-10V / DALI
<i>Body Material</i>	Aluminium
<i>Diffuser</i>	Polycarbonate
<i>Finish</i>	White / Black
<i>IP Rating</i>	IP44
<i>Working Temperature</i>	-20°C to 40°C
<i>Rated Life</i>	50,000Hrs (L70)

ORDER INFORMATION

Product Code	X	YY	ZZ
WHLP-C17-15W	8 - CRI 83+	27 -2700K	W - White
WHLP-C21-20W	9 - CRI 93+	30 -3000K	B -Black
WHLP-C25-30W		40 -4000K	C - Custom
WHLP-C35-30W		50 -5000K	
WHLP-C40-40W			
WHLP-C50-50W			
WHLP-C60-60W			
WHLP-C80-80W			
WHLP-C100-100W			
WHLP-C120-120W			
WHLP-S35-30W			
WHLP-S40-40W			
WHLP-S50-50W			
WHLP-S60-60W			
WHLP-S80-80W			
WHLP-S100-100W			
WHLP-S120-120W			

Example: BLU-WHLP-C17-15W-830-W

Specification subject to change without notice