


BATTEN Pro


Surface Mounted Linear Light

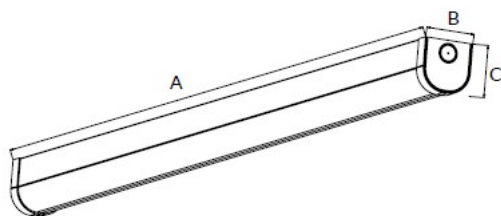

Dimension – A X B X C (mm)

600 x 65 x 66 (10W & 20W)

1200 x 65 x 66 (20W & 38W)



TECHNICAL DATA

Product Code	BLU-BATTEN-P		
Wattage	10W / 20W / 38W		
Luminous Flux	10W	20W	38W
	2700K – 1300lm	2700lm	5250lm
	3000K – 1350lm	2750lm	5300lm
	4000K – 1400lm	2800lm	5350lm
	6000K – 1450lm	2850lm	5400lm
Luminous Efficacy	>130lm/W		
SDCM	<3		
CRI	>83		
Beam Angle	120°		
Working Voltage	100-240V AC, 50/60Hz		
LED Driver	Integral		
Control	Switched		
Body Material	Polycarbonate		
Diffuser	Polycarbonate		
IP Rating	IP40		
Working Temperature	-20°C to 50°C		
Rated Life	50,000Hrs (L70)		

ORDER INFORMATION

Product Code	X	YY	ZZ
BLU-BATTEN-P-60-10W	8 - CRI 80+	27 - 2700K	IP40 – IP40
BLU-BATTEN-P-60-20W		30 - 3000K	
BLU-BATTEN-P-120-20W		40 - 4000K	
BLU-BATTEN-P-120-38W		60 - 6000K	

Example: BLU-BATTEN-P-60-10W-830-IP40

Specification subject to change without notice