



ECO 3 HE


High Efficiency Weatherproof LED Light

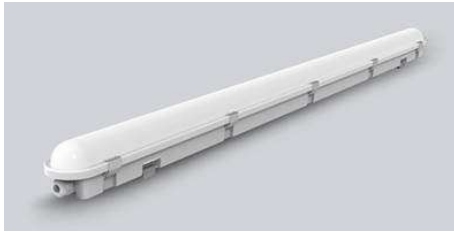

SIZE (L*W*H) **INSTALL SIZE (A/B)**

600*99*72	400/35
1200*99*72	900/35
1500*99*72	1200/35

Polar Curve

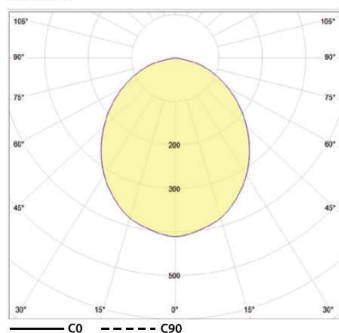

TECHNICAL DATA

Code	Wattage	Luminous Flux				Size LxWxH (mm)
		2700K	3000K	4000K	6000K	
ECO-3-HE-60	24W	3105	3150	3195	3240	600x99x72
ECO-3-HE-120	30W	3920	3960	4000	4050	1200x99x72
ECO-3-HE-120	40W	5245	5295	5350	5400	1200x99x72
ECO-3-HE-150	50W	6550	6615	6680	6750	1500x99x72
ECO-3-HE-150	60W	7860	7940	8020	8100	1500x99x72

<i>Luminous Efficacy</i>	Up to 135lm/W
<i>SDCM</i>	<3
<i>CRI</i>	>83/93
<i>Beam Angle</i>	120°
<i>Power Factor</i>	0.95
<i>Working Voltage</i>	220-240VAC, 50/60Hz
<i>LED Driver</i>	Integral
<i>Control</i>	Switched
<i>Special Feature Option</i>	Integral Motion Sensor (ON/OFF) Integral Emergency Kit
<i>Body Material</i>	Polycarbonate
<i>Diffuser</i>	Polycarbonate
<i>IP Rating</i>	IP65
<i>Working Temperature</i>	-15°C to 50°C
<i>Rated Life</i>	50,000Hrs (L70)

ORDER INFORMATION

Product Code	X	YY	ZZ	AA
BLU-ECO-3-HE-60	24W	8 - CRI 83+	27 -2700K	MS-Motion
BLU-ECO-3-HE-120	30W		30 -3000K	Sensor
BLU-ECO-3-HE-120	40W		40 -4000K	EM-Emergency
BLU-ECO-3-HE-150	50W		60 -6000K	Kit
BLU-ECO-3-HE-150	60W			

Example: BLU-ECO-3-HE-60-24W-827-MS

Specification subject to change without notice