


Length: 600 / 1200 / 1500 mm

Width: 85 mm

Height: 78 mm

Option:- Available with Integral Emergency Kit

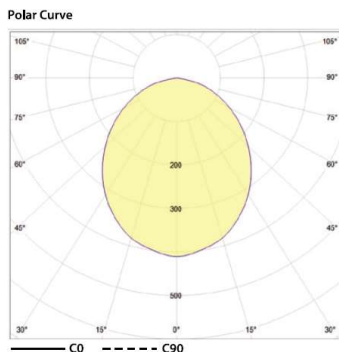

TECHNICAL DATA

Code	Wattage	Luminous Flux				Size L x W x H (mm)
		2700K	3000K	4000K	6000K	
CLIMA-60	25W	2950	3005	3060	3125	600x85x78
CLIMA-60	30W	3540	3605	3675	3750	600x85x78
CLIMA-120	40W	4710	4805	4900	5000	1200x85x78
CLIMA-150	60W	7060	7205	7350	7500	1500x85x78

Luminous Efficacy >120lm/W

SDCM <3

CRI >83

Beam Angle 120°

Working Voltage 100-240V AC, 50/60Hz

LED Driver Integral

Control Switched / Dimmable

Body Material Aluminium

Diffuser Polycarbonate

IP Rating IP65

Working Temperature -20°C to 50°C

Rated Life 50,000Hrs (L70)

ORDER INFORMATION

Product Code	Watt	X	YY	ZZ
BLU-CLIMA-60	25W	8 - CRI 83+	27 -2700K	IP65
BLU-CLIMA-120	30W	9 - CRI 93+	30 -3000K	
BLU-CLIMA-150	40W		40 -4000K	
	60W		60 -6000K	

Example: BLU-CLIMA-120-40W-840-IP65

Specification subject to change without notice