


ROOTZ R Series



ROOTZ S Series



Mounting Sleeve

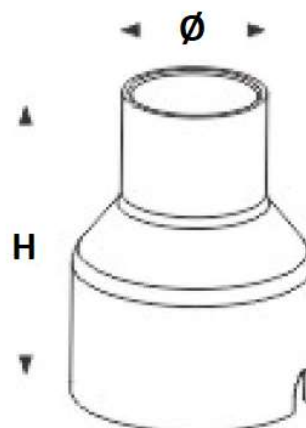

TECHNICAL DATA

Code	Wattage	Luminous Flux				Size (Ø X H)mm	Mounting Sleeve (Ø X H)mm	Cut out (mm)
		2700K	3000K	4000K	6000K			
ROOTZ-R3	1.5W	140	145	150	155	38 X 65	34 X 83	34
ROOTZ-R4	2W	170	174	178	185	45 X 65	42 X 83	42
ROOTZ-R5	3W	240	245	250	255	55 X 82	48 X 115	48
ROOTZ-R7	5W	420	430	440	450	70 X 82	59 X 133	59
ROOTZ-S3	1.5W	140	145	150	155	38 X 38 X 65	34 X 83	34
ROOTZ-S4	2W	170	174	178	185	45 X 45 X 65	42 X 83	42
ROOTZ-S5	3W	240	245	250	255	55 X 55 X 82	48 X 115	48
ROOTZ-S7	5W	420	430	440	450	70 X 70 X 82	59 X 133	59

<i>SDCM</i>	<3
<i>CRI</i>	>83/93
<i>Beam Angle</i>	15°/25°/45°/60°/120°
<i>Working Voltage</i>	220-240V AC, 50/60Hz
<i>LED Driver</i>	Integral (Switched), Remote (0-10V / DALI)
<i>Control</i>	Switched / 1-10V / DALI
<i>Body Material</i>	Die Cast Aluminium
<i>Diffuser</i>	Tempered Glass
<i>IP Rating</i>	IP67
<i>Working Temperature</i>	-20°C to 50°C
<i>Rated Life</i>	50,000Hrs (L70)

ORDER INFORMATION

Product Code	X	YY	ZZ
ROOTZ-R3-1.5W	8 - CRI 83+	27 -2700K	15 - 15 Deg
ROOTZ-R4-2W	9 - CRI 93+	30 -3000K	25 - 25 Deg
ROOTZ-R5-3W		40 -4000K	45 - 45 Deg
ROOTZ-R7-5W		60 -6000K	60 - 60 Deg
ROOTZ-S3-1.5W			120 - 120 Deg
ROOTZ-S4-2W			
ROOTZ-S5-3W			
ROOTZ-S7-5W			

Example: BLU-ROOTZ-R3-1.5W-827-15

Specification subject to change without notice