


# ROOTZ Adjustable (A)

In-Ground Buried Light


**SMD VERSION**



**COB VERSION (C)**

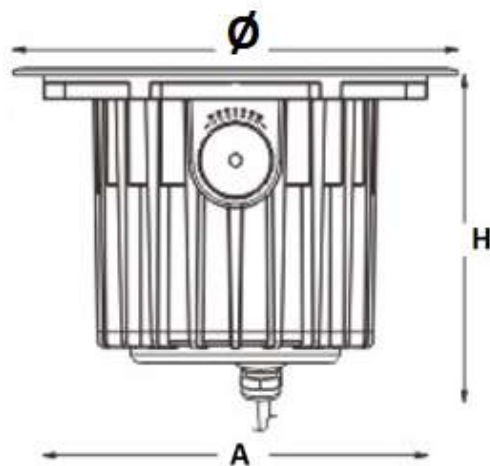

**Mounting Sleeve**

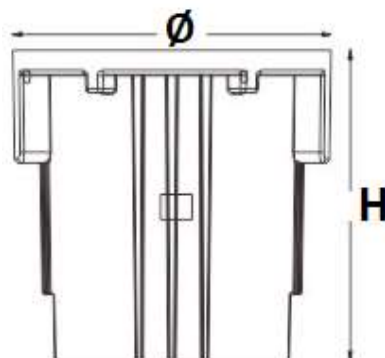

## TECHNICAL DATA

Code	Wattage	Luminuous Flux				Size (Ø X H X A)mm	Mounting Sleeve (Ø X H)mm	Cut out (mm)
		2700K	3000K	4000K	6000K			
ROOTZ-R9A	3W	258	260	265	270	95 X 116 X 78	85 X 118	85
ROOTZ-R13A	6W	520	540	570	600	130 X 133 X 112	119 X 136	119
ROOTZ-R13A-C	10W	840	860	880	900	130 X 133 X 112	119 X 136	119
ROOTZ-R16A	12W	1040	1050	1060	1070	160 X 153 X 140	147 X 156	147
ROOTZ-R16A-C	15W	1290	1310	1320	1340	160 X 153 X 140	147 X 156	147
ROOTZ-R18A	18W	1550	1560	1580	1600	180 X 162 X 158	165 X 168	165
ROOTZ-R18A-C	20W	1720	1740	1760	1780	180 X 162 X 158	165 X 168	165
ROOTZ-R21A	24W	2080	2100	2120	2140	210 X 181 X 186	193 X 194	193
ROOTZ-R21A-C	25W	2160	2170	2190	2200	210 X 181 X 186	193 X 194	193
ROOTZ-R25A	36W	3100	3120	3140	3160	250 X 190 X 216	223 X 212	223
ROOTZ-R25A-C	40W	3460	3480	3495	3505	250 X 190 X 216	223 X 212	223

<i>SDCM</i>	<3
<i>CRI</i>	>83/93
<i>Beam Angle</i>	SMD Version - 8° /15°/30°/40°/60° COB Version (C) - 18°/24° / 38°/60°
<i>Working Voltage</i>	220-240V AC, 50/60Hz
<i>LED Driver</i>	Integral (Switched), Remote (0-10V / DALI)
<i>Control</i>	Switched / 1-10V / DALI
<i>Body Material</i>	Die Cast Aluminium
<i>Diffuser</i>	Tempered Glass
<i>Adjustable Angle</i>	25°
<i>IP Rating</i>	IP67
<i>Working Temperature</i>	-20°C to 50°C
<i>Rated Life</i>	50,000Hrs (L70)

## ORDER INFORMATION

---

Product Code	X	YY	ZZ
ROOTZ-R9A-3W	8 - CRI 83+	27 -2700K	8 - 8 Deg
ROOTZ-R13A-6W	9 - CRI 93+	30 -3000K	15 - 15 Deg
ROOTZ-R13A-C-10W		40 -4000K	30 - 30 Deg
ROOTZ-R16A-12W		60 -6000K	40 - 40 Deg
ROOTZ-R16A-C-15W			60 - 60 Deg
ROOTZ-R18A-18W			18 - 18 Deg
ROOTZ-R18A-C-20W			24 - 24 Deg
ROOTZ-R21A-24W			38 - 38 Deg
ROOTZ-R21A-C-25W			
ROOTZ-R25A-36W			
ROOTZ-R25A-C-40W			

Example: BLU-ROOTZ-R9A-3W-827-15

*Specification subject to change without notice*