
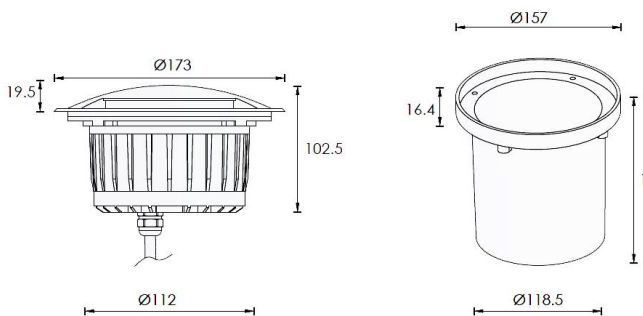


TECHNICAL DATA

<i>Product Code</i>	BLU-MARKZ-R17-V1/V2/V4
<i>Wattage</i>	4W (System Wattage)
<i>Luminous Flux</i>	2700K – 340lm 3000K – 345lm 4000K – 350lm 6000K – 355lm
<i>Luminous Efficacy</i>	> 85 lm/W
<i>SDCM</i>	<3
<i>CRI</i>	>83
<i>Beam Angle</i>	V1/V2/V4
<i>Working Voltage</i>	24VDC/240VAC
<i>LED Driver</i>	Remote / Integral
<i>Control</i>	Switched
<i>Body Material</i>	Aluminium die cast
<i>Optics</i>	Tempered glass
<i>IP Rating</i>	IP67
<i>IK Rating</i>	IK10
<i>Working Temperature</i>	-20°C to 50°C
<i>Rated Life</i>	50,000Hrs (L70)

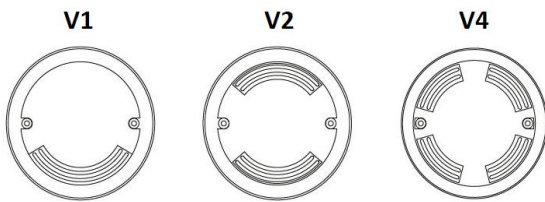

ORDER INFORMATION

Product Code	X	YY
BLU-MARKZ-R17-V1-4W	8 - CRI 83+	27 – 2700K
BLU-MARKZ-R17-V2-4W		30 - 3000K
BLU-MARKZ-R17-V4-4W		40 – 4000K
		60 – 6000K

Example: BLU-MARKZ-R17-4W-V1-827

Specification subject to change without notice