


BULKZ D2 (Grill Version)

Wall Mounted Light

TECHNICAL DATA

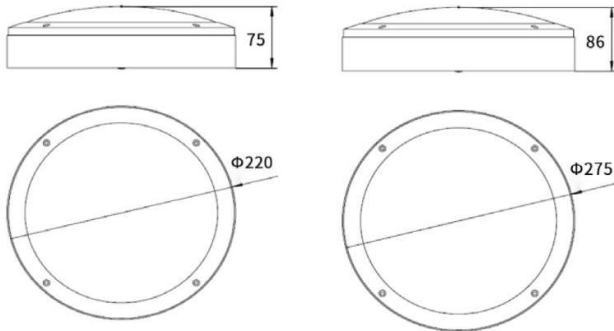

15W

20W

<i>Luminous Efficacy</i>	>85lm/W
<i>SDCM</i>	<3
<i>CRI</i>	>83
<i>Beam Angle</i>	110°
<i>Power Factor</i>	>0.95
<i>Working Voltage</i>	220-240V AC, 50/60Hz
<i>LED Driver</i>	Integral
<i>Control</i>	Switched
<i>Body Material</i>	Die cast Aluminium
<i>Diffuser</i>	Opal polycarbonate Diffuser
<i>IP Rating</i>	IP65
<i>IK Rating</i>	IK10
<i>Working Temperature</i>	-20°C to 50°C
<i>Rated Life</i>	50,000Hrs (L70)

BULKZ D2 CRG



BULKZ D2 NG



BULKZ D2 YG



BULKZ D2 CG



BULKZ D2 CCRG




BULKZ D2 (Grill Version)

Wall Mounted Light



Code	Wattage	Luminous Flux				Size (Ø X H)mm
		2700K	3000K	4000K	6000K	
BULKZ-D2-CRG	15	1330	1350	1380	1410	220 X 76
BULKZ-D2-CRG	20	1830	1850	1880	1910	275 X 86
BULKZ-D2-NG	15	1330	1350	1380	1410	220 X 76
BULKZ-D2-NG	20	1830	1850	1880	1910	275 X 86
BULKZ-D2-YG	15	1330	1350	1380	1410	220 X 76
BULKZ-D2-YG	20	1830	1850	1880	1910	275 X 86
BULKZ-D2-CG	15	1330	1350	1380	1410	220 X 76
BULKZ-D2-CG	20	1830	1850	1880	1910	275 X 86
BULKZ-D2-CCRG	15	1330	1350	1380	1410	220 X 76
BULKZ-D2-CCRG	20	1830	1850	1880	1910	275 X 86

ORDER INFORMATION

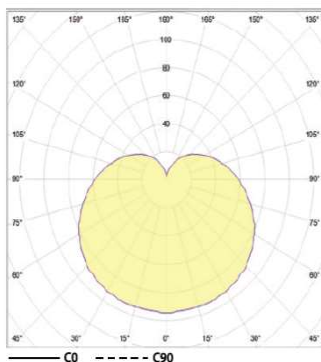

Product Code	X	YY	ZZ
BULKZ-D2-CRG-15W	8 - CRI 83+	27-2700K	IP65 - IP65
BULKZ-D2-CRG-20W		30 -3000K	
BULKZ-D2-NG-15W		40 -4000K	
BULKZ-D2-NG-20W		60 -6000K	
BULKZ-D2-YG-15W			
BULKZ-D2-YG-20W			
BULKZ-D2-CG-15W			
BULKZ-D2-CG-20W			
BULKZ-D2-CCRG-15W			
BULKZ-D2-CCRG-20W			

Example: BLU-BULKZ-D2-CRG-827-IP65

Specification subject to change without notice