



**IESNA
SUSTAINING
MEMBER**

Ref. No.: LCZF20060387

Version: 1.0

Date of issue: May 6, 2021

Total pages: 12



Test report of

IES LM-79-08

Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Rendered to:

Imminent Teknologies Limited

Suite 5, Valley Towers, Valley Road, Birkirkara BKR9022, Malta

For products:

LED Floodlight

Models No.:

BLU-FLOODZ-HM-300W-865-P50-B

Test Date: May. 5, 2021 to May. 6, 2021

Test Lab.: **LCTECH Guangdong Testing Services Co., Ltd.**

2/F., Technology and Enterprise Development Center, Guangyuan Road, Xiaolan, Zhongshan, Guangdong, China

Tel:+86-760-22833366

Fax:+86-760-22833399

E-mail:Service@lccert.com

http://www.lccert.com

Test Sites: 1/F., Building I, Technology and Enterprise Development Center, Guangyuan Road, Xiaolan, Zhongshan, Guangdong, China

Template No.: LC-RT-PL-001 Rev.1.4

Test Note: /

Complied by:

Kargel Yuan

May. 6, 2021

Reviewed by:

Lin Qiu

May. 6, 2021

The duplication of this report or parts of it and its use for advertising purposes is only allowed with permission of the testing laboratory. This report contains the result of the examination of the product sample submitted by the applicant. A general statement concerning the quality of the products from the series manufacture cannot be derived therefore. This report must not be used by the customer to claim product certification, approval or endorsement by NVLAP, NIST, or any agency of the Federal Government.



Table of Contents

1. General	3
1.1 Product Information	3
1.2 Standards or methods	4
1.3 Equipment list	4
2. Test conducted and method	5
2.1 Ambient Condition	5
2.2 Power Supply Characteristics	5
2.3 Seasoning and Stabilization	5
2.4 Electrical Instrumentation	5
2.5 Color Measurement Method	5
2.6 Total Luminous Flux Measurement Method	5
2.7 Luminous Intensity Distribution Measurement Method	5
2.8 Spatial Non-uniformity of Chromaticity	5
3. Test Result Summary	6
3.1 Electrical data	6
3.2 Photometric data	6
3.3 Color Rendering Details	6
4. Test Data	7
4.1 Spectral Distribution	7
4.2 ANSI Chromaticity Quadrangles Diagram	7
4.3 Goniometry Test Data	8
4.4 Zonal Lumen Summary	8
4.5 Polar Curves	9
4.6 Candela Tabulation	10
Appendix A Product Photo	12



LCTECH



1. General

1.1 Product Information

Brand Name	BLUi Lighting
Product Type	LED Floodlight
Model Number	BLU-FLOODZ-HM-300W-865-P50-B
Rated Inputs	220-240VAC, 50/60Hz
Rated Power	300W
Rated Light output	42000lm
Declared CCT	6500K
Power Supply	Meanwell
LED Package, Array or Module	Lumileds
Receipt Samples	1 unit
Sample Code of lab.	210407108001
Date of Receipt Samples	Apr. 7, 2021
Note	-



1.2 Standards or methods

The following standards are partly or totally used or referenced for test:

No.	Name
ANSI/NEMA/ ANSLG C78.377- 2017	Specifications for the Chromaticity of Solid State Lighting Products
ANSI C82.77-2002	Harmonic Emission Limits—Related Power Quality Requirements for Lighting Equipment
CIE Pub. No. 13.3-1995	Method of Measuring and Specifying Color Rendering of Light Sources
CIE Pub. No. 15:2004	Colorimetry
IES LM-79-08	Electrical and Photometric Measurements of Solid-State Lighting Products

1.3 Equipment list

Instrument	ID	Model name	Cal. date	Next cal. Date
AC Power supply	LC-I-987	APW-120N	2020-12-23	2021-12-22
AC Power supply	LC-I-989	APW-120N	2020-12-23	2021-12-22
Power analyzer	LC-I-928	WT210	2020-12-25	2021-12-24
Power analyzer	LC-I-954	WT210	2020-12-25	2021-12-24
Multimeter	LC-I-972	Fluke 17B	2020-07-20	2021-07-19
Photometric colorimetric electric system* (2 meter sphere)	LC-I-956	HAAS-2000	Before use	Before use
Standard lamp**	LC-PL-I-011	D204C	2020-07-14	2021-07-13
Luminous Flux Standard Lamp***	LC-PL-I-003	24V100W	2020-07-14	2021-07-13
Goniophotometer(with mirror)	LC-I-902	GMS2000	2021-04-22	2022-04-21
Wireless temperature transmitter	LC-I-PL-009	DWLR-DLR	2020-12-24	2021-12-23
Wireless temperature transmitter	LC-I-PL-008	DWLR-DLR	2020-12-24	2021-12-23

Note:

* Bandwidth of spectroradiometer is 1 nm.

** halogen lamp, 100W, omni-directional type, and its traceability to NIM.

*** halogen lamp, 100W, omni-directional type, and its traceability to NIM.

2. Test conducted and method

The luminaire was operated at least 2 hours to reach stabilization and temperature equilibrium before test.

2.1 Ambient Condition

The ambient temperature in which measurements are being taken was maintained at $25\text{ }^{\circ}\text{C} \pm 1\text{ }^{\circ}\text{C}$; the air flow around the sample(s) being tested did not affect the performance.

2.2 Power Supply Characteristics

The AC power supply had a sinusoidal voltage wave shape at the prescribed frequency (50 Hz) such that the RMS summation of the harmonic components does not exceed 3 percent of the fundamental during operation of the test item.

The voltage of AC power supply (RMS voltage) applied to the device under test was regulated to within ± 0.2 percent under load.

2.3 Seasoning and Stabilization

No seasoning was performed in accordance with IESNA LM-79-08. And before the measurement, the sample was stabilized until the light output and power variations were less than 0.5% in 30 minutes intervals (3 readings, 15 minutes apart).

2.4 Electrical Instrumentation

The calibration uncertainties of the instruments for AC voltage and current were less than 0.2 percent, and the calibration uncertainty of the AC power meter was less than 0.5 percent (95 % confidence interval, $k=2$).

2.5 Color Measurement Method

Spectral radiant flux was measured by a sphere (2 meter)-spectroradiometer system, and the color characteristics (Color rendering index, correlated color temperature, chromaticity coordinate) were calculated from these by software automatically.

2.6 Total Luminous Flux Measurement Method

Total luminous flux was measured by type C goniophotometer system.

Light intensity distribution was measured by a type C goniophotometer (with mirror) which can keep the sample in burn position when the tests conduct, and the total luminous flux was calculated from the intensity data by software automatically.

2.7 Luminous Intensity Distribution Measurement Method

Luminous intensity distribution was measured by a mirror-type goniophotometer (Type C) which can keep the sample in burn position when the tests conduct, and the kinds of graph were generated by software automatically.

2.8 Spatial Non-uniformity of Chromaticity

The customer did not require this measurement.



LCTECH



3. Test Result Summary

3.1 Electrical data

Criteria Item	Result(Sphere)	Result(Goniophotometer)
Input Voltage & Frequency	230.02 V~50Hz	229.93 V~50Hz
Input Current(A)	1.320	1.321
Total Power(W)	298.20	298.40
Power Factor	0.982	0.982
I-THD	-	-
Off-state Power(W)	-	-

3.2 Photometric data

Criteria Item	Result(Sphere)	Result(Goniophotometer)
Total Lumens(lm)	-	32487.07
Luminaire Efficacy(Lm/W)	-	108.87
Correlated Color Temperature (CCT)(K)	6503	-
Color Rendering Index (CRI)	81.9	-
R9	1	-
Chromaticity Coordinate (x,y)	x = 0.3122 y = 0.3329	-
Chromaticity Coordinate (u,v)	u = 0.1960 v = 0.3135	-
Chromaticity Coordinate (u',v')	u' = 0.1960 v' = 0.4703	-
Duv	0.0055	-
Zone Lumens between 0-60 °	-	92.70%
Beam Angle(50%Imax)	-	C0/180=83.8° C90/270=80.9°


3.3 Color Rendering Details

R1	R2	R3	R4	R5	R6	R7	R8
79	87	91	80	80	82	88	68
R9	R10	R11	R12	R13	R14	R15	-
1	68	78	55	82	95	75	-


Note: N/A

4. Test Data

4.1 Spectral Distribution

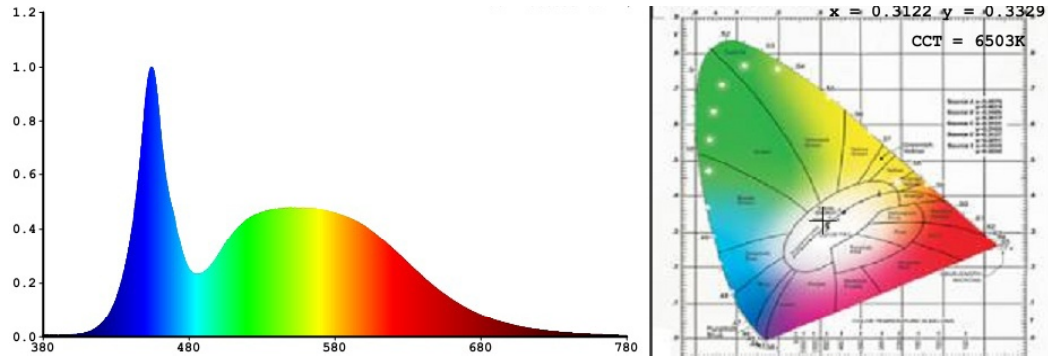

4.2 ANSI Chromaticity Quadrangles Diagram

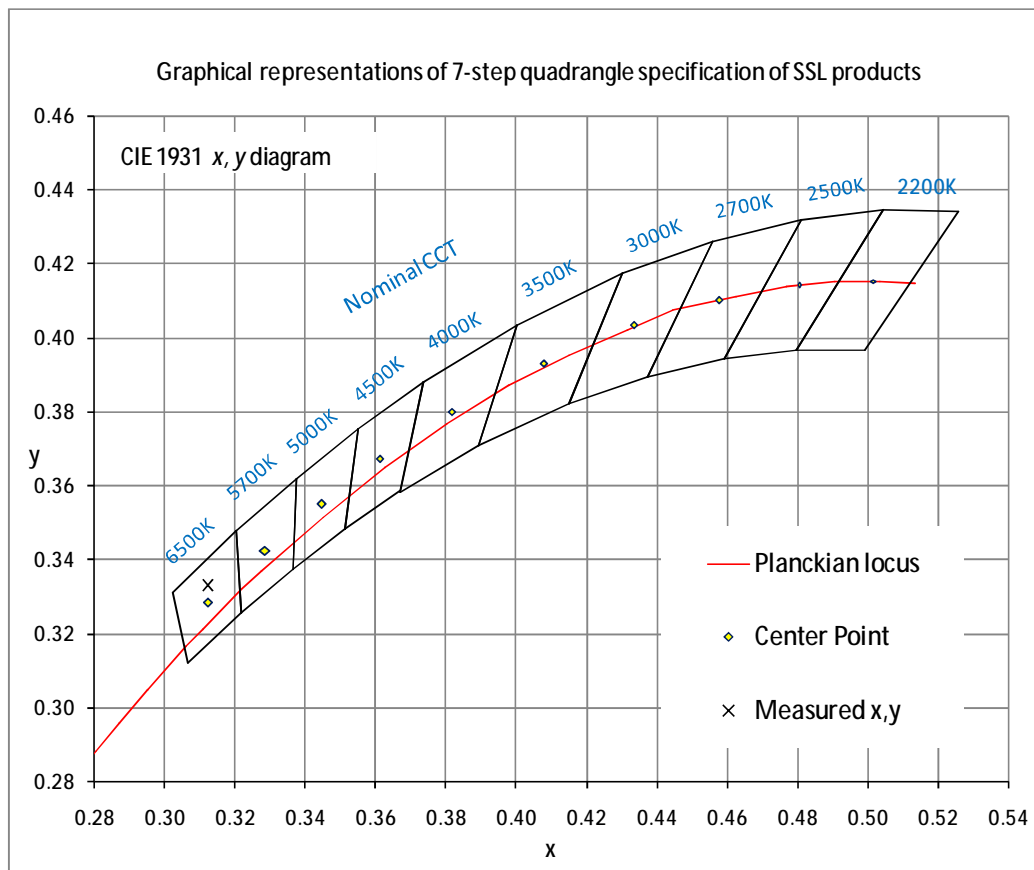



LCTECH



4.3 Goniometry Test Data

CIE Type	Direct	Basic Luminous Shape	Rectangular
Spacing Criteria (0-180)	2.88	Luminous Length	0.36 m
Spacing Criteria (90-270)	1.18	Luminous Width	0.24 m
Spacing Criteria (Diagonal)	1.34	Luminous Height	0.00 m
Test Distance	29.83 m		

4.4 Zonal Lumen Summary

Zone	Lumens	%Lamp	%Fixt
0-20	4521.26	13.90	13.90
0-30	10100.6	31.10	31.10
0-40	17351.48	53.40	53.40
0-60	30105.97	92.70	92.70
0-80	32309.35	99.50	99.50
0-90	32363.36	99.60	99.60
10-90	31233.74	96.10	96.10
20-40	12830.21	39.50	39.50
20-50	20122.04	61.90	61.90
40-70	14639.7	45.10	45.10
60-80	2203.38	6.80	6.80
70-80	318.18	1.00	1.00
80-90	54.00	0.20	0.20
90-110	32.70	0.10	0.10
90-120	45.58	0.10	0.10
90-130	58.97	0.20	0.20
90-150	87.61	0.30	0.30
90-180	123.71	0.40	0.40
110-180	91.01	0.30	0.30
0-180	32487.07	100.00	100.00

Total Luminaire Efficiency = 100.00%


ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	1129.62
10-20	3391.65
20-30	5579.34
30-40	7250.88
40-50	7291.83
50-60	5462.67
60-70	1885.2
70-80	318.18
80-90	54.00
90-100	18.93
100-110	13.77
110-120	12.88
120-130	13.38
130-140	13.35
140-150	15.30
150-160	16.79
160-170	14.01
170-180	5.31



LCTECH

4.5 Polar Curves

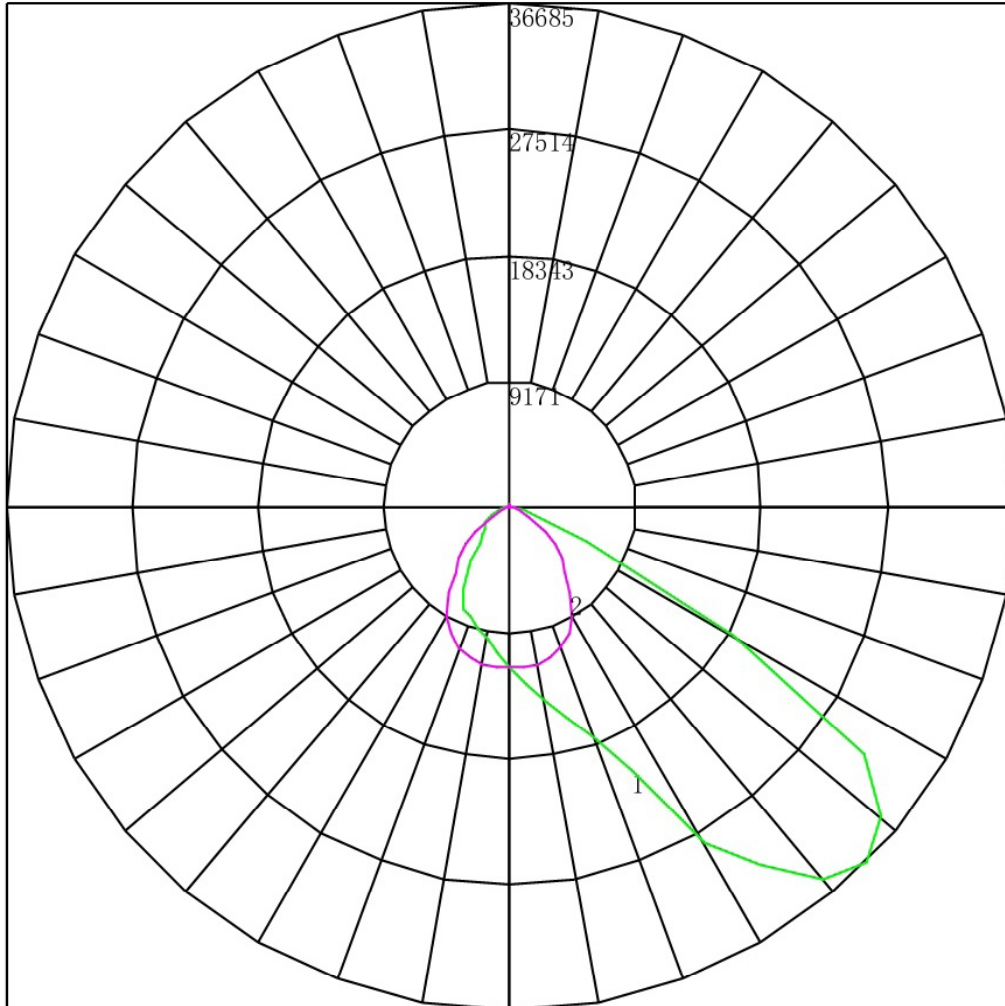

Maximum Candela = 36685.102 Located At Horizontal Angle = 0, Vertical Angle = 45
1 - Vertical Plane Through Horizontal Angles (0 - 180)
2 - Vertical Plane Through Horizontal Angles (90 - 270)

4.6 Candela Tabulation

	<u>0</u>	<u>15</u>	<u>30</u>	<u>45</u>	<u>60</u>	<u>75</u>	<u>90</u>	<u>105</u>	<u>120</u>	<u>135</u>
0	11700.06011700.06011700.06011700.06011700.06011700.06011700.06011700.06011700.06011700.06011700.060									
5	13023.84012959.16012835.55012638.33012360.50012075.36011736.19011467.28011201.60010998.610									
10	14370.29014289.51014033.79013569.36013025.36012384.97011664.79011085.06010632.38010300.240									
15	15960.65015674.00015066.05014323.02013460.78012508.59011402.44010522.4609989.589 9631.015									
20	17893.73017324.19916186.11014737.96013454.45012292.97010884.1909806.888 9280.801 9057.720									
25	21243.99019781.85017367.24014947.40013023.66011705.56010141.4308948.728 8533.453 8475.595									
30	28316.25024568.13118475.66014619.40011979.31010672.2409160.404 8076.295 7956.960 7727.610									
35	31924.92028005.67020154.40013669.83010650.7109253.591 7671.446 6565.482 6808.042 6735.649									
40	35488.25029516.68920181.01012076.3408657.823 7271.076 6228.937 5430.310 5410.921 5490.337									
45	36685.10229038.28917747.1609704.009 6651.752 6028.656 5298.661 4630.113 4439.219 4203.761									
50	35225.30927174.99014249.0206723.122 5343.239 4985.366 4318.065 3649.322 3394.523 2528.989									
55	31480.64122785.57010311.2404694.215 4107.664 3839.625 3090.169 2462.374 1966.600 1763.007									
60	18823.10014318.2805867.344 3184.991 2470.666 2211.915 1550.245 1036.723 1004.111 1091.804									
65	6056.758 5458.481 2392.792 1682.044 1046.403 967.503 639.065 488.558 516.991 625.293									
70	2524.254 1521.040 732.236 504.876 459.547 381.056 286.781 244.968 294.535 337.153									
75	962.916 504.774 270.811 226.840 221.160 207.263 140.466 113.714 128.646 157.852									
80	145.253 127.664 102.950 96.144 80.388 69.576 40.299 34.001 44.891 59.515									
85	70.451 66.810 59.264 51.202 41.702 29.959 18.408 26.848 36.392 46.556									
90	46.604 46.510 45.526 39.897 31.742 20.925 11.870 12.500 13.015 16.172									
95	5.712 6.496 7.048 7.685 7.659 7.546 9.333 11.621 12.350 16.215									
100	4.715 5.143 5.387 5.630 5.402 5.574 8.086 10.610 11.861 16.393									
105	3.355 3.383 3.413 3.708 3.233 3.689 6.494 9.733 11.419 17.422									
110	2.357 2.211 2.424 2.413 1.993 2.372 5.419 9.121 11.376 18.272									
115	2.901 2.977 2.559 2.323 2.435 2.633 5.677 9.386 11.907 19.077									
120	4.534 4.647 4.490 4.692 5.003 5.397 7.397 9.956 13.014 20.194									
125	7.344 7.444 7.543 7.998 8.456 8.950 9.333 10.306 13.677 20.640									
130	9.067 9.068 9.070 9.607 10.183 10.881 10.580 10.744 14.341 21.041									
135	10.155 10.105 10.192 10.634 11.245 11.977 11.784 11.885 15.492 21.667									
140	12.966 12.902 13.021 13.449 14.167 15.179 15.010 15.351 18.990 25.063									
145	17.409 17.369 17.646 18.185 19.303 20.532 20.343 20.790 24.392 29.444									
150	23.302 23.324 23.528 24.441 25.413 26.938 26.794 27.766 29.664 35.699									
155	30.556 30.677 30.937 31.813 32.939 34.264 34.020 34.698 37.764 41.197									
160	39.169 39.113 39.378 40.079 41.041 42.292 41.460 41.763 44.362 47.319									
165	46.604 46.512 46.787 47.318 47.948 48.916 48.041 47.084 50.606 52.905									
170	54.039 53.955 53.881 54.020 54.190 55.059 53.632 54.977 56.716 58.624									
175	60.024 59.550 59.359 59.203 59.059 59.139 57.804 60.284 61.807 63.180									
180	31.616 31.616 31.616 31.616 31.616 31.616 31.616 31.616 31.616 31.616									

Vert. Horizontal Angles

	<u>150</u>	<u>165</u>	<u>180</u>
0	11700.06011700.06011700.060		
5	10830.83010698.57010660.980		
10	10072.9309890.608 9786.924		
15	9367.121 9223.390 9094.205		
20	8933.898 8636.000 8463.141		
25	8333.507 8247.494 8204.732		
30	7712.439 7552.034 6948.952		
35	6638.152 5533.639 4886.208		
40	5095.346 3936.632 3511.650		
45	3661.263 2930.099 2823.465		
50	2804.969 2372.041 2469.852		
55	1898.392 1872.220 2301.206		
60	1372.535 1471.238 2113.519		
65	706.818 985.788 1386.798		
70	419.776 554.995 876.779		
75	175.641 285.266 354.792		
80	61.512 67.488 72.264		



LCTECH




CANDELA TABULATION - (Cont.)

85	57.019	66.404	71.176
90	22.130	29.185	58.392
95	23.924	32.974	37.628
100	26.034	37.350	42.615
105	28.731	40.149	46.423
110	29.900	41.322	46.151
115	30.575	40.421	44.066
120	30.575	37.579	39.985
125	29.228	34.782	36.268
130	29.001	34.330	35.815
135	29.406	34.014	35.271
140	31.472	35.909	37.084
145	34.888	38.573	39.895
150	40.007	43.354	44.700
155	43.959	45.926	46.604
160	49.259	50.573	51.047
165	54.737	56.528	57.303
170	60.573	62.211	63.106
175	64.612	65.640	66.280
180	31.616	31.616	31.616



LCTECH

Appendix A Product Photo

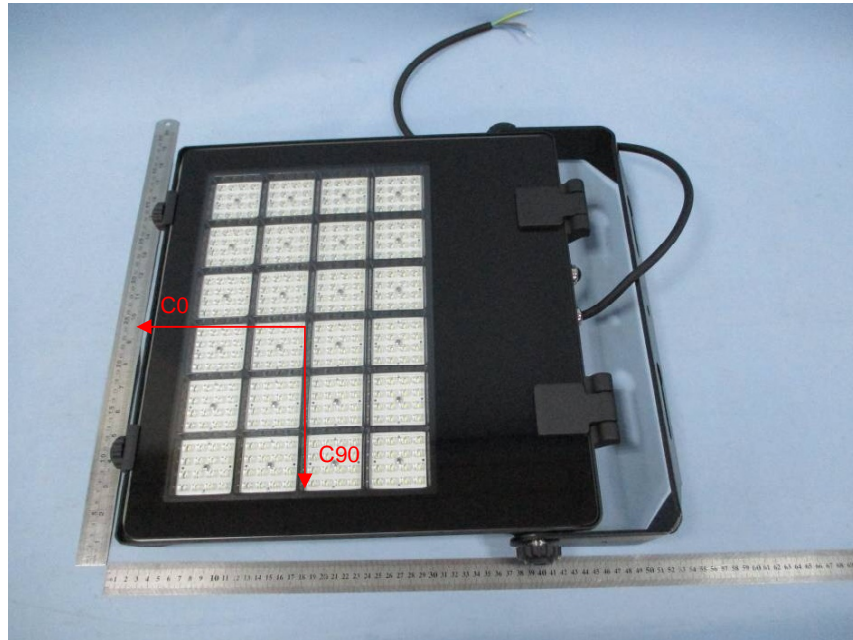

Picture 1



Picture 2

****End of test report****