



中国认可
国际互认
检测
TESTING
CNAS L3337

**IESNA
SUSTAINING
MEMBER**

Ref. No.: LCZP19090325
Version: 1.0
Date of issue: Sep. 30, 2019
Total pages: 9



Test report of

In Situ Temperature Measurement and TM-21

Rendered to:

Imminent Teknologies Limited

Suite 5, Valley Towers, Valley Road, Birkirkara BKR9022, Malta

For products:

LED MODULE

Models No.:

BLU-IS-2M-13W-827-38

Test Date: Sep. 27, 2019 to Sep. 29, 2019

Test Lab.: **LCTECH Guangdong Testing Services Co., Ltd.**

2/F., Building II, Technology and Enterprise Development Center, Guangyuan Road,
Xiaolan, Zhongshan, Guangdong, China

Tel:+86-760-22833366

Fax:+86-760-22833399

E-mail:Service@lccert.com

http://www.lccert.com

Test Sites: 2/F., Building II & 1/F., Building I, Technology and Enterprise Development Center,
Guangyuan Road, Xiaolan, Zhongshan, Guangdong, China

Template No.: LC-RT-PL-015 Rev.1.2

Test Note:

Complied by:

Kargel Yuan

Project Engineer

Sep. 30, 2019

Reviewed by:

Henry Li

Technical Manager

Sep. 30, 2019

The duplication of this report or parts of it and its use for advertising purposes is only allowed with permission of the testing laboratory. This report contains the result of the examination of the product sample submitted by the applicant. A general statement concerning the quality of the products from the series manufacture cannot be derived therefore.



Table of Contents

1. General	3
1.1 Product Information	3
1.2 Standards or methods	4
1.3 Equipment list	4
2. Test conducted and method	5
2.1 Ambient Condition	5
2.2 Temperature Stabilization	5
2.3 Thermocouples	5
2.4 Thermocouples contact	5
3. Test Result Summary	6
3.1 Electrical data	6
3.2 Temperature data	6
3.3 Lumen Maintenance Projection (IESNA TM-21 Method)	6
3.4 LM-80 Information	6
3.5 Thermocouple Contact Photo	7
3.6 TM-21 input and output	8
Appendix A Product Photo	9



LCTECH



1. General

1.1 Product Information

Brand Name	BLUi
Product Type	LED MODULE
Model Number	BLU-IS-2M-13W-827-38
Rated Inputs	36VDC
Rated Power	13W
Rated Light output	1100lm
Declared CCT	2700K
Power Supply	Integrated in luminaire
LED Package, Array or Module	Model: CXA1512, Cree, Inc.
Receipt Samples	1 unit
Sample Code of lab.	190812105015
Date of Receipt Samples	Aug. 12, 2019
Note	-

1.2 Standards or methods

The following standards are partly or totally used or referenced for test:

No.	Name
IEC 60598-1:2014+A1: 2017 Clause 12.4.1	Luminaires- Part 1: General requirements and tests
IES LM-80:2008*	Solid State Lighting Luminaires – Lumen Maintenance
IES LM-80:2015*	Measuring Luminous Flux and Color Maintenance of LED Packages, Arrays and Modules
IES TM-21-11	Projecting Long Term Lumen Maintenance of LED Light Sources
IES LM-84-14 Annex A*	Recommendations for measurement of In-situ conditions LED case Temperature, Ts

Note:

*For reference only, IES LM-80-08, IES LM-80-15 and IES LM-84-14 is not in the scope of CNAS(L3337) recognition.

1.3 Equipment list

Instrument	ID	Model name	Cal. date	Next cal. Date
AC Power supply	LC-I-923	CHP-500	2019-01-08	2020-01-07
AC Power supply	LC-I-987	APW-110N	2019-01-08	2020-01-07
Power analyzer	LC-I-928	WT210	2019-01-02	2020-01-01
Power analyzer	LC-I-954	WT210	2019-03-12	2020-03-11
Multimeter	LC-I-972	Fluke 17B	2019-07-29	2020-07-28
J thermocouple	LC-I-096	TT-J-30-SLE(200 m/r)	2019-02-27	2020-02-26
Data acquisition/Switch unit	LC-I-098	34970A	2019-02-27	2020-02-26
T&H recorder	LC-I-958	DWRP-B(0)	2019-08-08	2020-08-07

2. Test conducted and method

The luminaire provided by the client was installed to simulate intended usage to record the maximum temperature that can be encountered under the intended use.

2.1 Ambient Condition

Test was conducted in an ambient temperature of 25 ± 5 °C. Ambient temperature variations above or below 25 °C was respectively subtracted from or added to temperatures recorded at points on the luminaire.

The ambient temperature was measured by a thermocouple which was immersed in 15 ml of mineral oil in a glass container which was placed in the horizontal plane passing through the midpoint of the luminaire's vertical axis at a horizontal distance from the luminaire equal to at least 3 times the luminaire diameter

2.2 Temperature Stabilization

Measurements were not taken until the luminaire has stabilized thermally whose temperatures is changing at a rate less than 1 °C per hour.

2.3 Thermocouples

Temperatures recorded at points on LED was measured by means of thermocouples. Type J thermocouple was used. The thermocouples have conductors of 0.05mm^2 (30AWG), and complied with the requirements specified in ASTM MNL 12 and limits of error specified in NIST ITS 90 and ISA MC96.1.

2.4 Thermocouples contact

Thermocouples were directly in contact with the TMP_{LED} location described in LM-80 test report. In order to gain the maximum temperature, if appropriate, more than one thermocouple were contact in these locations. For details information, please refer to clause 3.3 for the photo of thermocouple contact..

3. Test Result Summary

3.1 Electrical data

Criteria Item	Result
Input Voltage & Frequency	37.2 V
Input Current(A)	0.350
Total Power(W)	13.02
Power Factor	1.000
Current on each LED(mA)	346

3.2 Temperature data

Criteria Item	Result
Total operated period(hours)	3.6
Ambient temperature(°C)	23.6
Measured Temperature @T _{MPLED} (°C)	78.5
Maximum Temperature @T _{MPLED} (Normalized to 25°C) (°C)	<u>79.9</u>

3.3 Lumen Maintenance Projection (IESNA TM-21 Method)

Criteria Item	Result
6000 hours lumen maintenance of LED light source	97.63%
forward current on each LED light source	346 mA
Projected L ₈₀ lumen maintenance life	<u>85000 hours</u>
Reported L ₈₀ lumen maintenance life	<u>>36000 hours</u>

Note: 1. Please refer to section 3.6 for details of TM-21 inputs and results.


3.4 LM-80 Information

Report originated by	Cree, Inc.		
Manufactured by	Cree, Inc.		
LM-80 report No.	N/A		
LED Model	CXA1512		
LED Part Number	CXA1512		
Number of LED light source tested	25 units per case temperature		
Drive Current	346mA		
Case temperature	105°C	-	-
lumen maintenance during 6000 hours test	97.40%	-	-
Color maintenance(Δu'v') during 6000 hours test	0.0014	-	-




LCTECH

3.5 Thermocouple Contact Photo

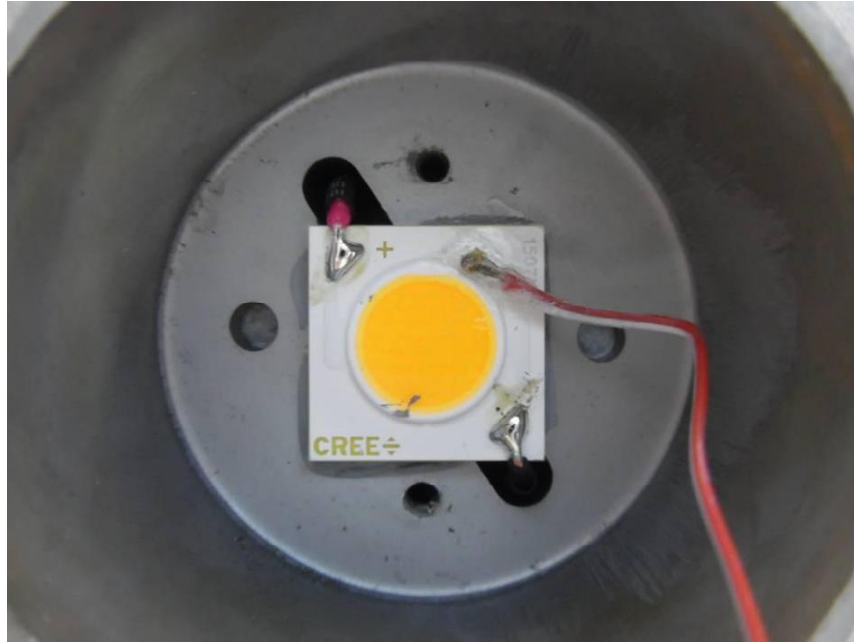

Part View

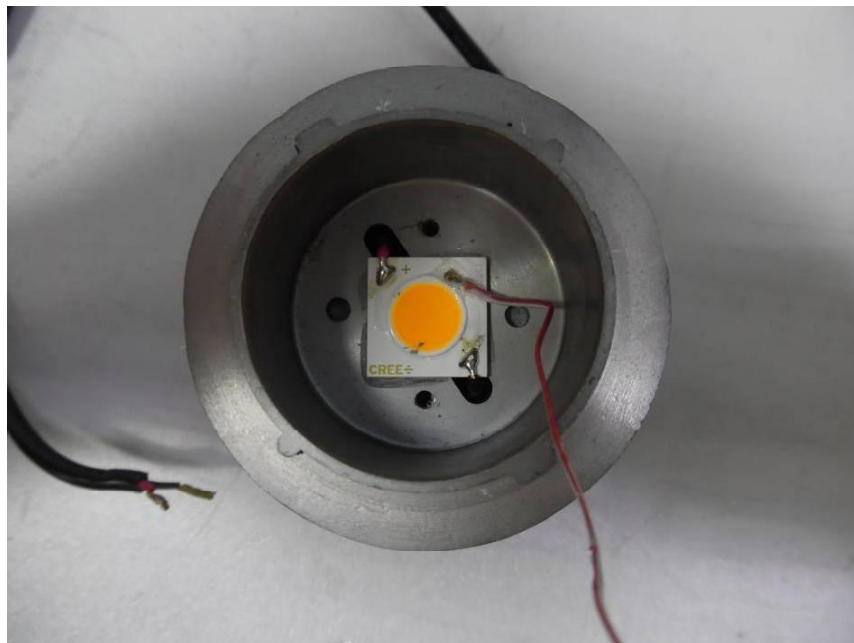

Over View



LCTECH

3.6 TM-21 input and output



TM-21 Inputs

<p>Instructions</p> <p>Yellow fields are completed by the user. Fields not used should be left blank. Cyan fields are calculated based on user entries.</p> <p>First, enter a description of the LED light source tested. Then complete the fields labeled "LM-80 Testing Details". Test duration must be at least 6,000 hours. If only one case temperature data set is to be used (no interpolation), complete only "Tested case temperature 1". If the in-situ values falls between two case temperatures, enter only those two case temperature data sets in Tested case temperature 1 and 2 in ascending temperature order.</p> <p>Next, further to the right, in the corresponding box(es) for each tested case temperature, enter the test data along with the time (in hours) at which each measurement was taken. Data entered must be normalized then averaged measured data (per TM-21 sections 5.2.1 and 5.2.2).</p> <p>Enter drive current, in-situ temperature data and the percentage of initial lumens to project to in the fields labeled "In-Situ Inputs".</p> <p>Results can be tailored to estimate lumen maintenance at a specific time by entering a value (t) in the yellow field. A complete TM-21 report will appear on the next tab labeled "Report".</p>	<p>Description of LED Light Source Tested (manufacturer, model, catalog number)</p> <p>Model: CXA1512, Cree, Inc.</p>	<p>LM-80 Test Inputs</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2">Test Data for 105°C Case Temperature</th> <th colspan="2">Test Data for 105°C Case Temperature</th> <th colspan="2">Test Data for 105°C Case Temperature</th> </tr> <tr> <th>Time (hours)</th> <th>Lumen Maintenance (%)</th> <th>Time (hours)</th> <th>Lumen Maintenance (%)</th> <th>Time (hours)</th> <th>Lumen Maintenance (%)</th> </tr> </thead> <tbody> <tr><td>0</td><td>100.00%</td><td></td><td></td><td></td><td></td></tr> <tr><td>1008</td><td>99.00%</td><td></td><td></td><td></td><td></td></tr> <tr><td>1512</td><td>98.70%</td><td></td><td></td><td></td><td></td></tr> <tr><td>2016</td><td>98.40%</td><td></td><td></td><td></td><td></td></tr> <tr><td>2520</td><td>98.30%</td><td></td><td></td><td></td><td></td></tr> <tr><td>3024</td><td>98.40%</td><td></td><td></td><td></td><td></td></tr> <tr><td>3528</td><td>98.40%</td><td></td><td></td><td></td><td></td></tr> <tr><td>4032</td><td>98.30%</td><td></td><td></td><td></td><td></td></tr> <tr><td>4536</td><td>98.20%</td><td></td><td></td><td></td><td></td></tr> <tr><td>5040</td><td>97.90%</td><td></td><td></td><td></td><td></td></tr> <tr><td>5544</td><td>97.70%</td><td></td><td></td><td></td><td></td></tr> <tr><td>6048</td><td>97.40%</td><td></td><td></td><td></td><td></td></tr> </tbody> </table>						Test Data for 105°C Case Temperature		Test Data for 105°C Case Temperature		Test Data for 105°C Case Temperature		Time (hours)	Lumen Maintenance (%)	Time (hours)	Lumen Maintenance (%)	Time (hours)	Lumen Maintenance (%)	0	100.00%					1008	99.00%					1512	98.70%					2016	98.40%					2520	98.30%					3024	98.40%					3528	98.40%					4032	98.30%					4536	98.20%					5040	97.90%					5544	97.70%					6048	97.40%				
	Test Data for 105°C Case Temperature		Test Data for 105°C Case Temperature		Test Data for 105°C Case Temperature																																																																																						
	Time (hours)	Lumen Maintenance (%)	Time (hours)	Lumen Maintenance (%)	Time (hours)	Lumen Maintenance (%)																																																																																					
	0	100.00%																																																																																									
1008	99.00%																																																																																										
1512	98.70%																																																																																										
2016	98.40%																																																																																										
2520	98.30%																																																																																										
3024	98.40%																																																																																										
3528	98.40%																																																																																										
4032	98.30%																																																																																										
4536	98.20%																																																																																										
5040	97.90%																																																																																										
5544	97.70%																																																																																										
6048	97.40%																																																																																										
<p>LM-80 Testing Details</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Total number of units tested per case temperature:</td><td>25</td></tr> <tr><td>Number of failures:</td><td>0</td></tr> <tr><td>Number of units measured:</td><td>25</td></tr> <tr><td>Test duration (hours):</td><td>6048</td></tr> <tr><td>Tested drive current (mA):</td><td>346</td></tr> <tr><td>Tested case temperature 1 (T_c, °C):</td><td>105</td></tr> <tr><td>Tested case temperature 2 (T_c, °C):</td><td>105</td></tr> <tr><td>Tested case temperature 3 (T_c, °C):</td><td>105</td></tr> </table>	Total number of units tested per case temperature:	25	Number of failures:	0	Number of units measured:	25	Test duration (hours):	6048	Tested drive current (mA):	346	Tested case temperature 1 (T _c , °C):	105	Tested case temperature 2 (T _c , °C):	105	Tested case temperature 3 (T _c , °C):	105	<p>In-Situ Inputs</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Drive current for each LED package/array/module (mA):</td><td>346</td></tr> <tr><td>In-situ case temperature (T_s, °C):</td><td>79.9</td></tr> <tr><td>Percentage of initial lumens to project to (e.g. for L₅₀, enter 70):</td><td>80</td></tr> </table>						Drive current for each LED package/array/module (mA):	346	In-situ case temperature (T _s , °C):	79.9	Percentage of initial lumens to project to (e.g. for L ₅₀ , enter 70):	80																																																															
Total number of units tested per case temperature:	25																																																																																										
Number of failures:	0																																																																																										
Number of units measured:	25																																																																																										
Test duration (hours):	6048																																																																																										
Tested drive current (mA):	346																																																																																										
Tested case temperature 1 (T _c , °C):	105																																																																																										
Tested case temperature 2 (T _c , °C):	105																																																																																										
Tested case temperature 3 (T _c , °C):	105																																																																																										
Drive current for each LED package/array/module (mA):	346																																																																																										
In-situ case temperature (T _s , °C):	79.9																																																																																										
Percentage of initial lumens to project to (e.g. for L ₅₀ , enter 70):	80																																																																																										
<p>Results</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Time (t) at which to estimate lumen maintenance (hours):</td><td>6,000</td></tr> <tr><td>Lumen maintenance at time (t) (%):</td><td>97.63%</td></tr> <tr><td>Reported L80 (hours):</td><td>>36000</td></tr> </table>								Time (t) at which to estimate lumen maintenance (hours):	6,000	Lumen maintenance at time (t) (%):	97.63%	Reported L80 (hours):	>36000																																																																														
Time (t) at which to estimate lumen maintenance (hours):	6,000																																																																																										
Lumen maintenance at time (t) (%):	97.63%																																																																																										
Reported L80 (hours):	>36000																																																																																										

TM-21 Input

TM-21 Report

<p>Table 1: Report at each LM-80 Test Condition</p> <p>Model: CXA1512, Cree, Inc.</p>			<p>Table 2: Interpolation Report (projection based on in-situ temperature entered)</p>																																																					
<p>Description of LED Light Source Tested (manufacturer, model, catalog number)</p>			<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>T_{s1} (°C)</td><td>105.00</td></tr> <tr><td>T_{s1} (K)</td><td>378.15</td></tr> <tr><td>α₁</td><td>2.535E-06</td></tr> <tr><td>B₁</td><td>0.991</td></tr> <tr><td>T_{s2} (°C)</td><td>-</td></tr> <tr><td>T_{s2} (K)</td><td>-</td></tr> <tr><td>α₂</td><td>-</td></tr> <tr><td>B₂</td><td>-</td></tr> <tr><td>E_{lm}</td><td>-</td></tr> <tr><td>A</td><td>-</td></tr> <tr><td>B₀</td><td>0.991</td></tr> <tr><td>T_{s1} (°C)</td><td>79.90</td></tr> <tr><td>T_{s1} (K)</td><td>353.05</td></tr> <tr><td>α₁</td><td>2.535E-06</td></tr> <tr><td>Reported L80(βk) at 79.9°C (hours)</td><td>>36000</td></tr> </table>			T _{s1} (°C)	105.00	T _{s1} (K)	378.15	α ₁	2.535E-06	B ₁	0.991	T _{s2} (°C)	-	T _{s2} (K)	-	α ₂	-	B ₂	-	E _{lm}	-	A	-	B ₀	0.991	T _{s1} (°C)	79.90	T _{s1} (K)	353.05	α ₁	2.535E-06	Reported L80(βk) at 79.9°C (hours)	>36000																					
T _{s1} (°C)	105.00																																																							
T _{s1} (K)	378.15																																																							
α ₁	2.535E-06																																																							
B ₁	0.991																																																							
T _{s2} (°C)	-																																																							
T _{s2} (K)	-																																																							
α ₂	-																																																							
B ₂	-																																																							
E _{lm}	-																																																							
A	-																																																							
B ₀	0.991																																																							
T _{s1} (°C)	79.90																																																							
T _{s1} (K)	353.05																																																							
α ₁	2.535E-06																																																							
Reported L80(βk) at 79.9°C (hours)	>36000																																																							
<p>Test Condition 1 - 105°C Case Temp</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Sample size</td><td>25</td></tr> <tr><td>Number of failures</td><td>0</td></tr> <tr><td>DUT drive current used in the test (mA)</td><td>346</td></tr> <tr><td>Test duration (hours)</td><td>6,048</td></tr> <tr><td>Test duration used for projection (hour to hour)</td><td>1,008 - 6,048</td></tr> <tr><td>Tested case temperature (°C)</td><td>105</td></tr> <tr><td>α</td><td>2.535E-06</td></tr> <tr><td>B</td><td>0.991</td></tr> <tr><td>Reported L80(βk) (hours)</td><td>>36000</td></tr> </table>	Sample size	25	Number of failures	0	DUT drive current used in the test (mA)	346	Test duration (hours)	6,048	Test duration used for projection (hour to hour)	1,008 - 6,048	Tested case temperature (°C)	105	α	2.535E-06	B	0.991	Reported L80(βk) (hours)	>36000	<p>Test Condition 2 - 105°C Case Temp</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Sample size</td><td>25</td></tr> <tr><td>Number of failures</td><td>0</td></tr> <tr><td>DUT drive current used in the test (mA)</td><td>346</td></tr> <tr><td>Test duration (hours)</td><td>6,048</td></tr> <tr><td>Test duration used for projection (hour to hour)</td><td>1,008 - 6,048</td></tr> <tr><td>Tested case temperature (°C)</td><td>105</td></tr> <tr><td>α</td><td>#DIV/0!</td></tr> <tr><td>B</td><td>#DIV/0!</td></tr> <tr><td>Reported L80(βk) (hours)</td><td>#DIV/0!</td></tr> </table>	Sample size	25	Number of failures	0	DUT drive current used in the test (mA)	346	Test duration (hours)	6,048	Test duration used for projection (hour to hour)	1,008 - 6,048	Tested case temperature (°C)	105	α	#DIV/0!	B	#DIV/0!	Reported L80(βk) (hours)	#DIV/0!	<p>Test Condition 3 - 105°C Case Temp</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Sample size</td><td>25</td></tr> <tr><td>Number of failures</td><td>0</td></tr> <tr><td>DUT drive current used in the test (mA)</td><td>346</td></tr> <tr><td>Test duration (hours)</td><td>6,048</td></tr> <tr><td>Test duration used for projection (hour to hour)</td><td>1,008 - 6,048</td></tr> <tr><td>Tested case temperature (°C)</td><td>105</td></tr> <tr><td>α</td><td>#DIV/0!</td></tr> <tr><td>B</td><td>#DIV/0!</td></tr> <tr><td>Reported L80(βk) (hours)</td><td>#DIV/0!</td></tr> </table>	Sample size	25	Number of failures	0	DUT drive current used in the test (mA)	346	Test duration (hours)	6,048	Test duration used for projection (hour to hour)	1,008 - 6,048	Tested case temperature (°C)	105	α	#DIV/0!	B	#DIV/0!	Reported L80(βk) (hours)	#DIV/0!
Sample size	25																																																							
Number of failures	0																																																							
DUT drive current used in the test (mA)	346																																																							
Test duration (hours)	6,048																																																							
Test duration used for projection (hour to hour)	1,008 - 6,048																																																							
Tested case temperature (°C)	105																																																							
α	2.535E-06																																																							
B	0.991																																																							
Reported L80(βk) (hours)	>36000																																																							
Sample size	25																																																							
Number of failures	0																																																							
DUT drive current used in the test (mA)	346																																																							
Test duration (hours)	6,048																																																							
Test duration used for projection (hour to hour)	1,008 - 6,048																																																							
Tested case temperature (°C)	105																																																							
α	#DIV/0!																																																							
B	#DIV/0!																																																							
Reported L80(βk) (hours)	#DIV/0!																																																							
Sample size	25																																																							
Number of failures	0																																																							
DUT drive current used in the test (mA)	346																																																							
Test duration (hours)	6,048																																																							
Test duration used for projection (hour to hour)	1,008 - 6,048																																																							
Tested case temperature (°C)	105																																																							
α	#DIV/0!																																																							
B	#DIV/0!																																																							
Reported L80(βk) (hours)	#DIV/0!																																																							

<p>Report Generated By Kargel Yuan</p> <p>Company: LCTECH (Zhongshan) Testing Service Co., Ltd</p> <p>Date: Sep. 30, 2019</p>	<p>Notes:</p>
---	---------------

TM-21 Output

Appendix A Product Photo



Picture 1



Picture 2

****End of test report****