


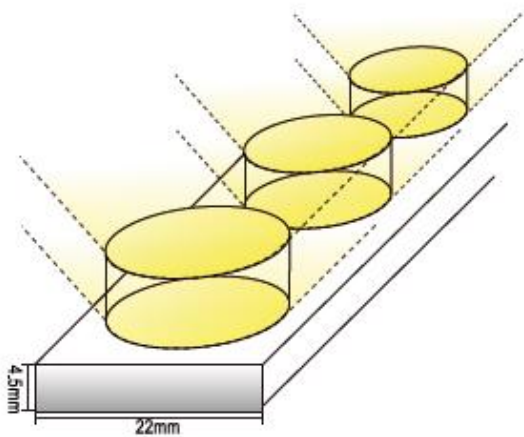

TECHNICAL DATA

<i>Product Code</i>	BLU-FLEX-LR-WG
<i>Wattage</i>	20W/Meter
<i>Luminous Flux</i>	2700K- 2000lm 3000K - 2050lm 4000K- 2100lm 6000K- 2150lm
<i>Luminous Efficacy</i>	>100 lm/W (30 LEDS/Mtr)
<i>Cutting Unit</i>	33.3mm/cut
<i>Length</i>	300mm-6W/330mm-7W/ 500mm-10W/ 1000mm-20W
<i>SDCM</i>	< 3
<i>CRI</i>	83 / 93
<i>Beam Angle</i>	10°/15°/30°/60°/30X45°/25X20
<i>Working Voltage</i>	24 VDC
<i>LED Driver</i>	Remote
<i>Control</i>	Switched / 0-10 / DALI
<i>Body Material</i>	Aluminium
<i>Optics</i>	PC Lens
<i>IP Rating</i>	IP67
<i>Working Temperature</i>	-20°C to 50°C
<i>Rated Life</i>	50,000Hrs (L70)

ORDER INFORMATION

Product Code	X	YY	ZZ
BLU-FLEX-LR-WG-20W	8 - CRI 83+	27 - 2700K	10 – 10D
		30 - 3000K	15 – 15D
	9 - CRI 93+	40 - 4000K	30 – 30D
		60 – 6000K	60 – 60D
			30X45 – ASY 25X20 – ASY

Example: BLU-FLEX-LR-WG-20W-827-10D

Specification subject to change without notice