



# ROOTZ Pro LH

In Ground Linear Uplight



Available Lengths – 300mm / 500mm / 1000mm

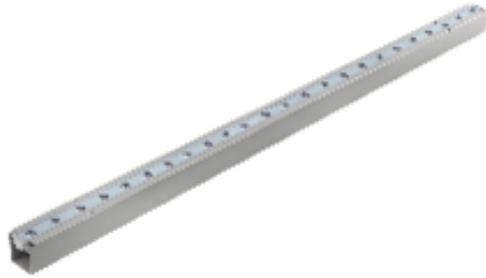

## TECHNICAL DATA

Product Code	BLU-ROOTZ-PLH		
Wattage	8W / 12W / 24W		
Luminous Flux	<b>8W</b>	<b>12W</b>	<b>24W</b>
	2700K – 640lm	980lm	1980lm
	3000K – 690lm	1010lm	2020lm
	4000K – 720lm	1050lm	2060lm
	6000K – 750lm	1100lm	2100lm
Luminous Efficacy	> 80lm/W		
SDCM	<3		
CRI	>83		
Beam Angle	10°/15°/30°/45°/60°/10X60°		
Working Voltage	24V DC		
LED Driver	Remote		
Control	Switched, DALI & 0-10V (Remote)		
Body Material	Die-cast Aluminum		
Optics	Tempered glass		
IP Rating	IP67		
Working Temperature	-20°C to 50°C		
Rated Life	50,000Hrs (L70)		

## ORDER INFORMATION

Product Code	X	YY	ZZ
BLU-ROOTZ-PLH30-8W	8 - CRI 83+	27 - 2700K	10-10°
BLU-ROOTZ-PLH50-12W		30 - 3000K	15-15°
BLU-ROOTZ-PLH100-24W		40 - 4000K	30-30°
		60 - 6000K	45-45°
			60-60°
			Asy-10X60°

Example: BLU-ROOTZ-PLH30-8W-827-10

Specification subject to change without notice