




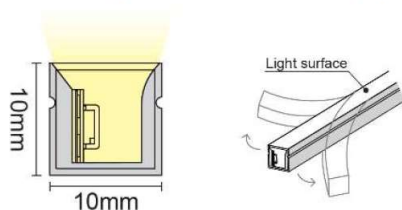

1010H (Horizontal Bending)



1010V (Vertical Bending)

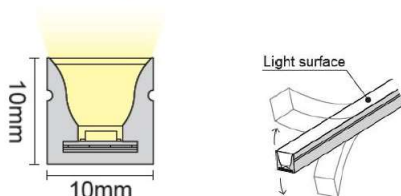

TECHNICAL DATA

Wattage	Luminous Flux (lm)			
	2700K	3000K	4000K	6000K
6W	480	500	520	540
9W	720	740	760	780
12W	960	980	1000	1020

Luminous Efficacy >80lm/W

SDCM <3

CRI >83/93

Beam Angle 120°

Working Voltage 24VDC

LED Driver Remote

Control Switched / 1-10V / DALI

Body Material Silicone & Aluminium

Diffuser Silicone

IP Rating / IK Rating IP67 / IK07


Working Temperature -20°C to 50°C

Rated Life 50,000Hrs (L70)

ORDER INFORMATION

Product Code	X	YY	ZZ
BLU-GFLX-1010H/V-6W	8 - CRI 83+	27 – 2700K	IP67-IP67
BLU-GFLX-1010H/V-9W	9 - CRI 93+	30 – 3000K	
BLU-GFLX-1010H/V-12W		40 – 4000K	
		60 – 6000K	

Example: BLU-GFLX-1010H-6W-830-IP67



Specification subject to change without notice