



SPEAR RQ

Outdoor Projector Light

BLU
Lighting Optimized...

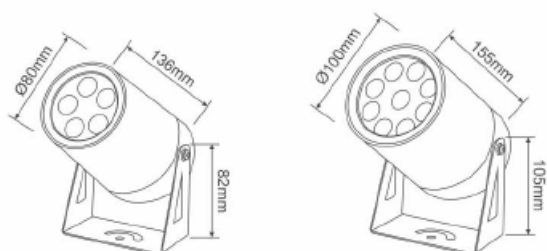

TECHNICAL DATA

Product Code	BLU-SPEAR-RQ			
Wattage	10W/15W/20W/25W			
Luminous Flux	10W	15W	20W	25W
	2700K – 800 lm	1200lm	1600lm	2000lm
	3000K – 810 lm	1220lm	1620lm	2020lm
	4000K – 820 lm	1240lm	1640lm	2040lm
	5000K – 830 lm	1260lm	1660lm	2060lm
Luminous Efficacy	>80 lm/W			
SDCM	<3			
CRI	>83/93			
Beam Angle	5° / 10° / 15°/30° / 45° / 60°			
Input Voltage	220-240VAC, 50/60Hz			
LED Driver	Integral/Remote			
Control	Switched (Integral) DALI & 0-10V (Remote)			
Body Material	Die cast Aluminum			
Optics	Tempered Glass			
IP Rating	IP66			
Working Temperature	-20°C to 50°C			
Rated Life	50,000Hrs (L70)			

ORDER CONFORMATION

Product Code	XX	YY	ZZ
BLU-SPEAR-R8Q-10W	8-83CRI	27-2700K	5 – 5°
BLU-SPEAR-R8Q-15W	9-93CRI	30-3000K	10 – 10°
BLU-SPEAR-R10Q-20W		40-4000K	15 – 15°
BLU-SPEAR-R10Q-25W		50-5000K	30 – 30°
			45 – 45°
			60 – 60°

Example: BLU-SPEAR-R8Q-10W-830-5

Specification subject to change without notice

