
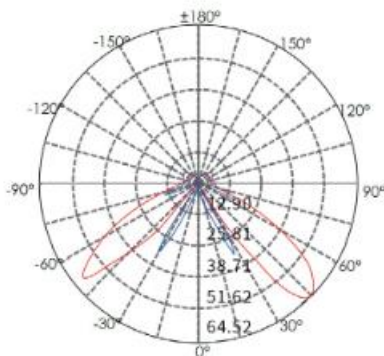


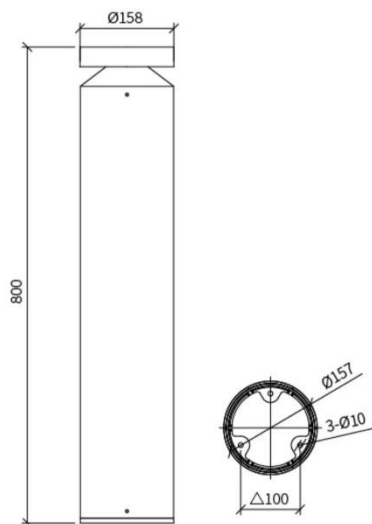

TECHNICAL DATA

Product Code	BLU-STKC-D		
Wattage	7W / 9W / 12W		
Luminous Flux	7W	9W	12W
	2700K – 560lm	720lm	960lm
	3000K – 570lm	730lm	970lm
	4000K – 580lm	740lm	980lm
	6000K – 590lm	750lm	990lm
Luminous Efficacy	>80lm/W		
SDCM	<3		
CRI	>80		
Beam Angle	90°		
Power Factor	>0.95		
Working Voltage	100-240 VAC, 50/60Hz		
LED Driver	Integral		
Control	Switched		
Body Material	Die cast Aluminium		
Diffuser	Polycarbonate		
IP Rating	IP65		
Working Temperature	-20°C to 50°C		
Rated Life	50,000Hrs (L70)		

ORDER INFORMATION

Product Code

BLU-STKC-D-7W
BLU-STKC-D-9W
BLU-STKC-D-12W

X

8 - CRI 80+

YY

27 - 2700K
30 - 3000K
40 - 4000K
60 - 6000K



Example: BLU-STKC-D-7W-827

Specification subject to change without notice