


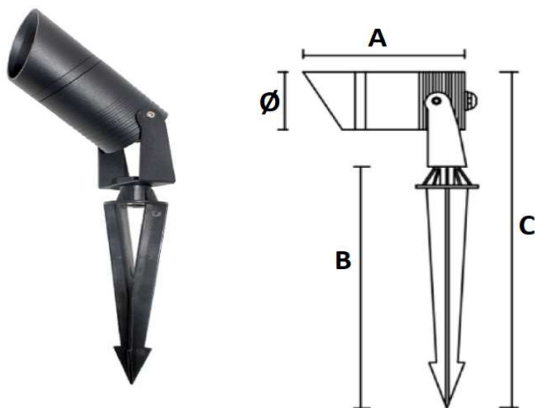

TECHNICAL DATA

Wattage	Luminous Flux				Ø X A X B X C
	2700K	3000K	4000K	6000K	
5W	405	425	445	465	50 X 125 X 210 X 292
10W	810	830	850	870	64 X 138 X 210 X 310
15W	1215	1235	1255	1275	76 X 185 X 260 X 372
20W	1620	1640	1660	1680	90 X 168 X 260 X 398
30W	2430	2450	2470	2490	108 X 220 X 260 X 410

Luminous Efficacy > 80lm/W

SDCM <3

CRI 83 / 93

Beam Angle 15°/24°/38°/45°/60°

Working Voltage 24VDC / 240VAC

LED Driver Integral

Control Switched (Integral) /1-10/DALI (Remote)

Body Material Die-cast Aluminium

Diffuser Tempered glass

Accessories Cowl (C), Spike (S), Tree Strap (TS)

IP Rating IP66

Working Temperature -20°C to 50°C

Rated Life 50,000Hrs (L70)

ORDER INFORMATION

Product Code	X	YY	ZZ
BLU-SPEAR-RL5-5W	8 - CRI 83	27 - 2700K	15 - 15 Deg
BLU-SPEAR-RL6-10W	9 - CRI 93	30 - 3000K	24 - 24 Deg
BLU-SPEAR-RL7-15W		40 - 4000K	38 - 38 Deg
BLU-SPEAR-RL9-20W		60 - 6000K	45 - 45 Deg
BLU-SPEAR-RL10-30W			60 - 60 Deg

Example: BLU-SPEAR-RL6-10W-827-15

Specification subject to change without notice