

FLOODZ-A

LED Flood Light


BLU
Lighting Optimized...




Bracket mounting




Pole mounting




Asymmetrical Intense 55° F01602




Symmetrical 60° F01605




Asymmetrical Intense 38° F00502




Symmetrical 30° F01604




Asymmetrical Intense 50° F01609




Symmetrical 100°X120° F00501



Asymmetrical Intense 50° F01629



Symmetrical 60° F01629

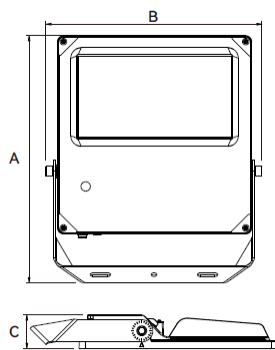

TECHNICAL DATA

Product Code	BLU-FLOODZ-A	
Wattage	240W	500W
Luminous Flux	2700K – 38400lm	80000lm
	3000K – 38600lm	80200lm
	4000K – 38800lm	80400lm
	6000K – 39000lm	80600lm
Luminous Efficacy	Up to 160 lm/W	
SDCM	<3	
CRI	>73/83	
Beam Angle	Symmetrical -30°/60° ASY	
Power Factor	0.95	
Input Voltage	220-240VAC, 50/60Hz	
LED Driver	Integral	
Control	Switched, 0-10V, DALI	
Body Material	Die Cast Aluminium	
Optics	PMMA	
SIZE AxBxC(mm)	530mmx470mmx95mm (240W)	
	622mmx489mmx72mm (500W)	
IP Rating	IP66	
Working Temperature	-15°C to 50°C	
Rated Life	50,000Hrs (L90, B10)	

ORDER CONFORMATION

Product Code	XX	YY	ZZ
BLU-FLOODZ-A-240W	7-73CRI	27-2700K	30°-30
BLU-FLOODZ-A-500W	8-83CRI	30-3000K	60°-60
		40-4000K	ASY-ASY
		60-6000K	

Example: BLU-FLOODZ-A-240W-827-30-IP66

Specification subject to change without notice