



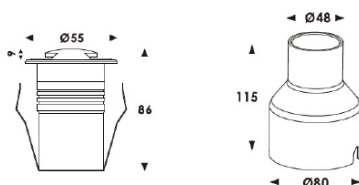

TECHNICAL DATA

Product Code	BLU-MARKZ-R5L-V1/V2/V4
Wattage	3W (System Wattage)
Luminous Flux	2700K – 120lm 3000K – 130lm 4000K – 140lm 6000K – 150lm
Luminous Efficacy	> 40 lm/W
SDCM	<3
CRI	>83
Beam Angle	V1/V2/V4
Working Voltage	24VDC/240VAC
LED Driver	Remote / Integral
Control	Switched
Body Material	Aluminium die cast,
Optics	Tempered glass
IP Rating	IP67
IK Rating	IK10
Working Temperature	-20°C to 50°C
Rated Life	50,000Hrs (L70)

ORDER INFORMATION

Product Code	X	YY
BLU-MARKZ-R5L-V1-3W	8 - CRI 83+	27 – 2700K
BLU-MARKZ-R5L-V2-3W		30 - 3000K
BLU-MARKZ-R5L-V4-3W		40 – 4000K
		60 – 6000K

Example: BLU-MARKZ-R5L-V1-3W-827

Specification subject to change without notice