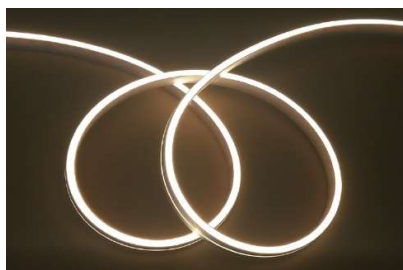






Horizontal Bending (H)



Vertical Bending (V)



TECHNICAL DATA

Wattage	Luminous Flux (lm)			
	2700K	3000K	4000K	6000K
6W	480	500	520	540
9W	720	740	760	780
12W	960	980	1000	1020
18W	1440	1460	1480	1500
24W	1920	1940	1960	1980
28W	2240	2260	2280	2300

<i>Luminous Efficacy</i>	> 80lm/W
<i>SDCM</i>	<3
<i>CRI</i>	>83/93
<i>Beam Angle</i>	120° / 180°
<i>Working Voltage</i>	24V DC
<i>LED Driver</i>	Remote
<i>Control</i>	Switched / 1-10V / DALI
<i>Body Material</i>	Silicone
<i>Diffuser</i>	Silicone
<i>IP Rating</i>	IP67
<i>Working Temperature</i>	-20°C to 50°C
<i>Rated Life</i>	50,000Hrs (L70)




IP67
[IP Rating]

SDCM
<3

5M
& 10M
[per roll]
























UV Resistant














Saltwater
Resistant

TECHNICAL DATA

GLOWFLEX (GFLX)	Fixture and Profile Dimensions	Light Distribution	Bending Axis (H/V)	Wattage
10X10			V	6W / 9W / 12W
16X16			V	6W / 9W / 12W
20X14			V	12W / 18W / 24W
25X17			V	12W / 18W / 24W
30X20			V	18W / 24W / 28W
40X25			V	18W / 24W / 28W

50X25			V	18W / 24W / 28W
70X30			V	18W / 24W / 28W
100X30			V	18W / 24W / 28W
16X24			H	6W / 9W / 12W
03X08			H	6W / 9W / 12W
06X16			H	6W / 9W / 12W

10X18			H	6W / 9W / 12W
12X20			H	6W / 9W / 12W
12X25			H	6W / 9W / 12W
13X13			V	6W / 9W / 12W
30X32			H	12W / 18W
Ø13 270D			V	6W / 9W / 12W
Ø22 360D			H	6W / 9W / 12W

ORDER INFORMATION

Product Code	Type	Bending	Wattage	X	YY
BLU-GFLX-D	1010	H	6W	8 - CRI 83+	27 -2700K
	1616	V	9W	9 - CRI 93+	30 -3000K
	2014		12W		40 -4000K
	2517		18W		60 -6000K
	3020		24W		
	4025		28W		
	5025				
	7030				
	10030				
	1624				
	308				
	616				
	1018				
	1220				
	1225				
	1313				
	3032				
	13D				
	22D				

Example: BLU-GFLX-D-1010V-6W-830

Specification subject to change without notice