


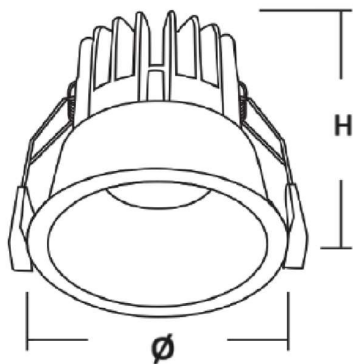

TECHNICAL DATA

Code	Wattage	Luminous Flux				Size Ø x H (mm)
		2700K	3000K	4000K	5000K	
RETRO-R-Y-6	6W	550	600	650	700	62 x 60
RETRO-R-Y-6	8W	750	800	850	900	62 x 60
RETRO-R-Y-8	8W	750	800	850	900	80 x 75
RETRO-R-Y-8	12W	1125	1200	1275	1350	80 x 75
RETRO-R-Y-9	12W	1125	1200	1275	1350	95 x 100

Luminous Efficacy

>95lm/W

SDCM

<3

CRI

>83 / 93

Beam Angle

15°/24°/36°/60°

Working Voltage

36 VDC

LED Driver

Remote

Control

Switched/1-10/DALI

Body Material

Die-cast Aluminium

Optics

PMMA

Cut Out

55mm (RETRO-R-Y-6), 75mm (RETRO-R-Y-8),
80mm (RETRO-R-Y-9)

Diffuser

PMMA / Glass

IP Rating

IP54 / IP65

Working

-20°C to 50°C

Temperature Rated

50,000Hrs (L70)

Life

ORDER INFORMATION

Product Code	X	YY	ZZ
BLU-RETRO-R-Y-6-6W/ 8W	8 - CRI 83+	27 -2700K	15 - 15 Deg
BLU-RETRO-R-Y-8-8W/12W	9 - CRI 93+	30 -3000K	24 - 24 Deg
BLU-RETRO-R-Y-9-12W		40 -4000K	36 - 36 Deg
		50 -5000K	60 - 60 Deg

Example: BLU-RETRO-R-Y-8-8W-827-15

Specification subject to change without notice