



CEDO-PRO

Ceiling Mounted Light

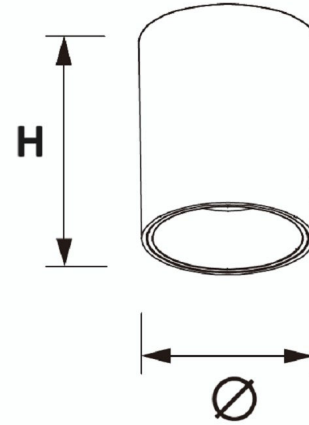

IP Rating



LED



Beam Angle



Base Material



CE



RoHS



Rated Life



Warranty

Key Features:

- Made from Aluminum ensuring durability and a sleek finish.
- IP65 rated, protecting against dust and water ingress.
- Designed to operate in temperatures ranging from -20°C to 50°C.
- Rated life at 50,000Hrs (L70)

SDCM	<3	Control	Switched / 1-10V / DALI
CRI	>83/93	Body Material	Aluminum
Beam Angle	15°/24°/38°/60°	Optics	PMMA
Power Factor	>0.95	IP Rating	IP65
Working Voltage	240V AC, 50/60Hz	Working Temp	-20°C to 50°C
LED Driver	Integral	Rated Life	50,000Hrs (L70)

Technical Data

Product Code	Wattage	Luminous Flux				Size (Ø X H) mm
		2700K	3000K	4000K	5000K	
BLU-CEDO-P-R7	8W	680	700	720	740	75 X 100
BLU-CEDO-P-R7	12W	1020	1040	1060	1080	75 X 152
BLU-CEDO-P-R9	20W	1700	1750	1800	1850	95 X 152

CEDO-PRO

Ceiling Mounted Light

Technical Data


Product Code	Wattage	Luminous Flux				Size (Ø X H) mm
		2700K	3000K	4000K	5000K	
BLU-CEDO-P-R11	30W	2550	2600	2650	2700	115 X 152
BLU-CEDO-P-R14	40W	3480	3530	3580	3630	140 X 162
BLU-CEDO-P-R17	60W	5220	5290	5360	5430	170 X 182
BLU-CEDO-P-R20	80W	7600	7690	7780	7870	205 X 212

Ordering Code:

Product Code	X	YY	ZZ
BLU-CEDO-P-R7-8W	8 - CRI 83+	27 -2700K	15 - 15 Deg
BLU-CEDO-P-R7-12W	9 - CRI 93+	30 -3000K	24 - 24 Deg
BLU-CEDO-P-R9-20W		40 -4000K	38 - 38 Deg
BLU-CEDO-P-R11-30W		50 -5000K	60 - 60 Deg
BLU-CEDO-P-R14-40W			
BLU-CEDO-P-R17-60W			
BLU-CEDO-P-R20-80W			

Example: BLU- CEDO-P-R7-8W-830-15

Typical Applications:

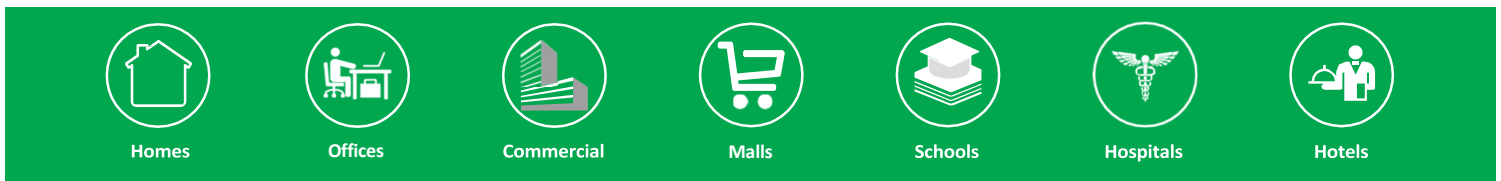

Our products use the following LED Chips & Drivers

LED Chips:



LED Drivers:

