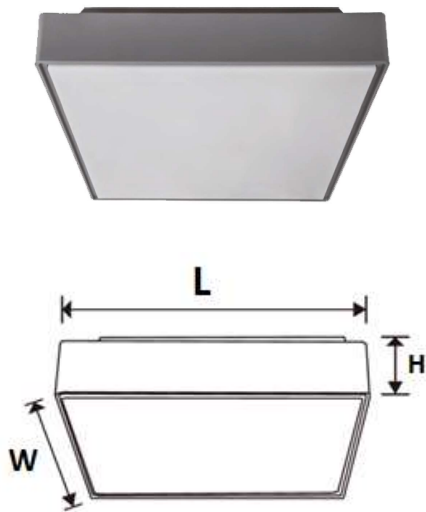


TECHNICAL DATA

Code	Wattage	Luminous Flux				Size L x W x H (mm)
		2700K	3000K	4000K	6000K	
DEIM-22	10W	800	820	840	860	220x220x56
DEIM-29	15W	1200	1220	1240	1260	296x296x78
DEIM-40	20W	1600	1620	1640	1660	400x400x93

Luminous Efficacy >80lm/W

SDCM <3

CRI >80

Beam Angle 120°

Power Factor >0.95

Working Voltage 220-240 VAC, 50/60Hz

LED Driver Integral

Control Switched

Body Material Polycarbonate + ABS

Diffuser Polycarbonate

IP Rating IP65

Working Temperature -20°C to 50°C

Rated Life 50,000Hrs (L70)

ORDER INFORMATION

Product Code	X	YY	ZZ
BLU-DEIM-22-10W	8 - CRI 80+	27 -2700K	IP65
BLU-DEIM-29-15W		30 -3000K	
BLU-DEIM-40-20W		40 -4000K	
		60 -6000K	

Example: BLU-DEIM-22-10W-827-IP65

Specification subject to change without notice