


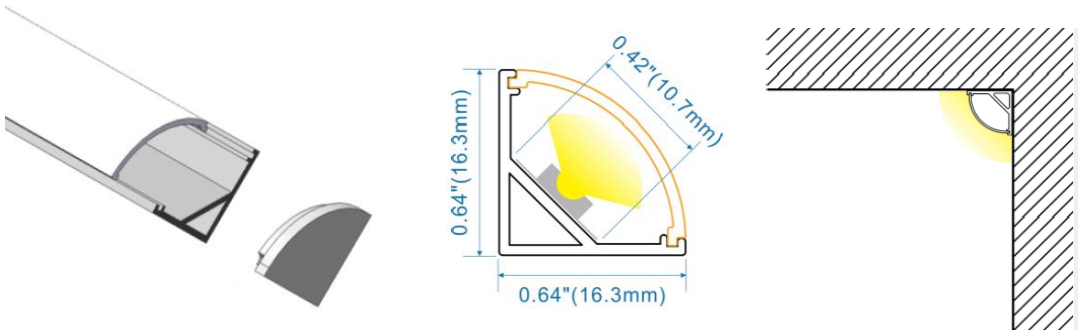

TECHNICAL DETAIL


Description	Material	Code Reference
Aluminium Profile	6063-T5 Aluminium	BLU-EXTRU-CH
Diffuser	OPAL / Clear	BLU-EXTRU-DF
End Cap	Plastic / Aluminium	BLU-EXTRU-EC
Monting Clip	Stainless Steel	BLU-EXTRU-CLP

ORDER INFORMATION

Product Code	XX	YY
BLU-EXTRU-CH	SC1616	0.5M
		1M
		1.5M
		2M
		2.5M
		3M

Example: BLU-EXTRU-CH-SC1616-1M

Specification subject to change without notice



TECHNICAL DATA

Product Code	BLU-FLEXI-C			
Wattage	4.8W / 7.2W / 9.6W / 14.4W			
Luminous Flux	4.8W	7.2W	9.6W	14.4W
	2400K - 460lm	695lm	920lm	1380lm
	2700K - 470lm	705lm	940lm	1410lm
	3000K - 480lm	720lm	960lm	1440lm
	4000K - 490lm	735lm	980lm	1470lm
	6000K - 500lm	750lm	1000lm	1500lm
Luminous Efficacy	>95 lm/W			
SDCM	< 3			
CRI	83 / 93			
Beam Angle	120°			
Working Voltage	24 VDC			
LED Driver	Remote			
Control	Switched / 0-10 / DALI			
Body Material	Silicone Extrusion IP67			
Optics	No secondary optics			
IP Rating	IP20/IP65/IP67			
Working Temperature	-20°C to 50°C			
Rated Life	50,000Hrs (L70)			

ORDER INFORMATION

Product Code	X	YY	ZZ
BLU-FLEXI-C-4.8W	8 - CRI 83+	24 - 2400K	IP67 - IP67
BLU-FLEXI-C-7.2W	9 - CRI 93+	27 - 2700K	
BLU-FLEXI-C-9.6W		30 - 3000K	
BLU-FLEXI-C-14.4W		40 - 4000K	
		60 - 6000K	

Example: BLU-FLEXI-C-4.8W-827-IP67

Specification subject to change without notice