


SPEAR RB

Surface Mounted Spike Light



TECHNICAL DATA

Wattage	Luminous Flux				Ø X A X B X C
	2700K	3000K	4000K	6000K	
5W	415	425	430	435	55 X 69 X 266 X 373
10W	830	850	860	870	69 X 88 X 266 X 395
15W	1245	1275	1290	1305	85 X 109 X 266 X 420
20W	1660	1700	1720	1740	108 X 146 X 266 X 486

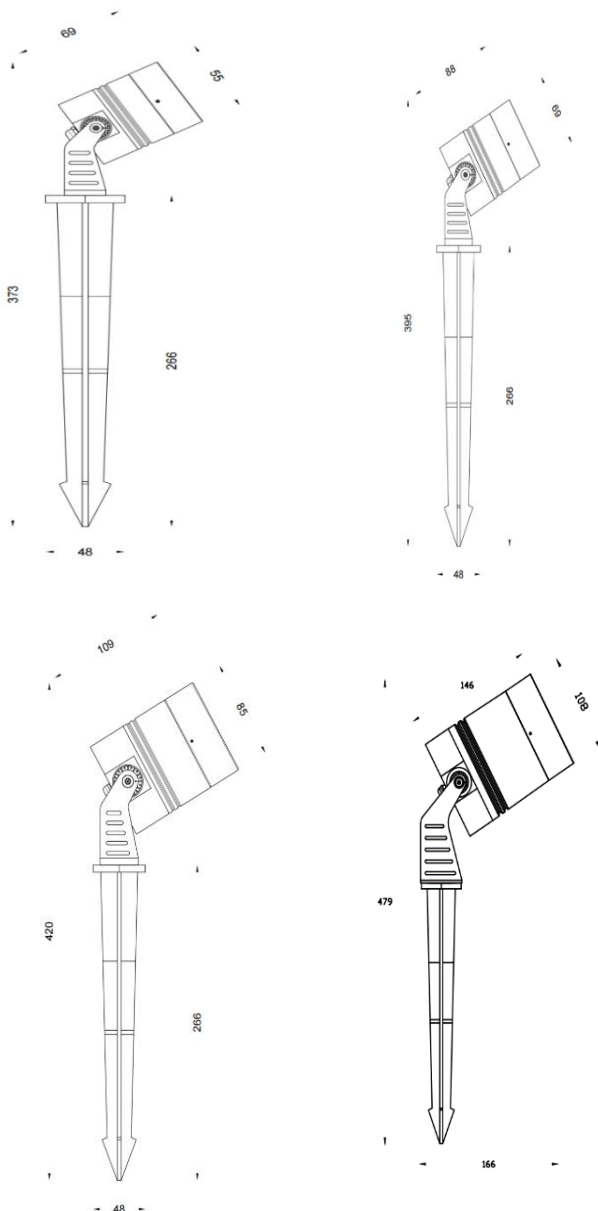

Luminous Efficacy	> 85lm/W
SDCM	<3
CRI	83 / 93
Beam Angle	15°/24°/36°/60°
Working Voltage	24VDC / 240VAC
LED Driver	Integral
Control	Switched (Integral) /1-10/DALI (Remote)
Body Material	Die-cast Aluminium
Diffuser	Tempered glass
Accessories	Cowl (C), Spike (S), Tree Strap (TS)
IP Rating	IP66
Working Temperature	-20°C to 50°C
Rated Life	50,000Hrs (L70)

ORDER INFORMATION

Product Code	X	YY	ZZ
BLU-SPEAR-R5B-5W	8 - CRI 83	27 - 2700K	15 - 15 Deg
BLU-SPEAR-R6B-10W	9 - CRI 93	30 - 3000K	24 - 24 Deg
BLU-SPEAR-R8B-15W		40 - 4000K	36 - 36 Deg
BLU-SPEAR-R10B-20W		60 - 6000K	60 - 60 Deg

Example: BLU-SPEAR-R6B-10W-827-15

Specification subject to change without notice