
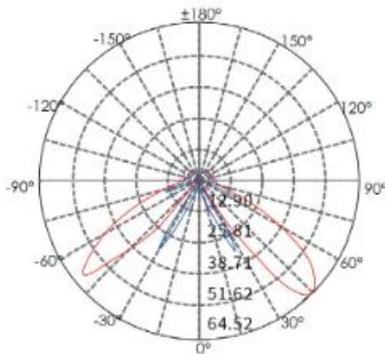


# Stake D

Outdoor Bollard Light

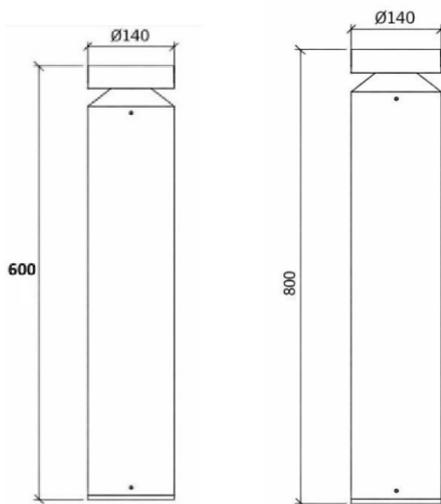

## TECHNICAL DATA

Product Code	BLU-STKC-D		
Wattage	7W / 9W / 12W		
Luminous Flux	7W	9W	12W
	2700K – 560lm	720lm	960lm
	3000K – 570lm	730lm	970lm
	4000K – 580lm	740lm	980lm
	6000K – 590lm	750lm	990lm
Luminous Efficacy	>80lm/W		
SDCM	<3		
CRI	>80		
Beam Angle	180° / 360°		
Power Factor	>0.95		
Working Voltage	100-240 VAC, 50/60Hz		
LED Driver	Integral		
Control	Switched		
Body Material	Die cast Aluminium		
Diffuser	Polycarbonate		
IP Rating	IP65		
Working Temperature	-20°C to 50°C		
Rated Life	50,000Hrs (L70)		

## ORDER INFORMATION

Product Code	X	YY	ZZ
BLU-STKC-D-7W	8 - CRI 80+	27 - 2700K	0.6M-600MM
BLU-STKC-D-9W		30 - 3000K	0.8M-800MM
BLU-STKC-D-12W		40 - 4000K	
		60 - 6000K	



Example: BLU-STKC-D-7W-827-0.6M

Specification subject to change without notice