



SPEAR RQ

Outdoor Projector Light

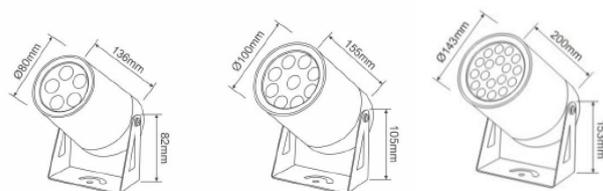

TECHNICAL DATA

<i>Product Code</i>	BLU-SPEAR-RQ				
<i>Wattage</i>	10W/15W/20W/25W/40W				
<i>Luminous Flux</i>	10W	15W	20W	25W	40W
	2700K – 800 lm	1200lm	1600lm	2000lm	3200lm
	3000K – 810 lm	1220lm	1620lm	2020lm	3240lm
	4000K – 820 lm	1240lm	1640lm	2040lm	3280lm
	5000K – 830 lm	1260lm	1660lm	2060lm	3320lm
<i>Luminous Efficacy</i>	>80 lm/W				
<i>SDCM</i>	<3				
<i>CRI</i>	>83/93				
<i>Beam Angle</i>	5° / 10° / 15°/30° / 45° / 60°				
<i>Input Voltage</i>	220-240VAC, 50/60Hz				
<i>LED Driver</i>	Integral/Remote				
<i>Control</i>	Switched (Integral) DALI & 0-10V (Remote)				
<i>Body Material</i>	Die cast Aluminum				
<i>Optics</i>	Tempered Glass				
<i>IP Rating</i>	IP66				
<i>Working Temperature</i>	-20°C to 50°C				
<i>Rated Life</i>	50,000Hrs (L70)				

ORDER CONFORMATION

Product Code	XX	YY	ZZ
BLU-SPEAR-R8Q-10W	8-83CRI	27-2700K	5 – 5°
BLU-SPEAR-R8Q-15W	9-93CRI	30-3000K	10 – 10°
BLU-SPEAR-R10Q-20W		40-4000K	15 – 15°
BLU-SPEAR-R10Q-25W		50-5000K	30 – 30°
BLU-SPEAR-R14Q-40W			45 – 45°
			60 – 60°

Example: BLU-SPEAR-R8Q-10W-830-5

Specification subject to change without notice