

# DOUP R Series

Outdoor Light

**BLU** *i*  
Lighting Optimized...







**IK08**




# DOUP R Series

Outdoor Light

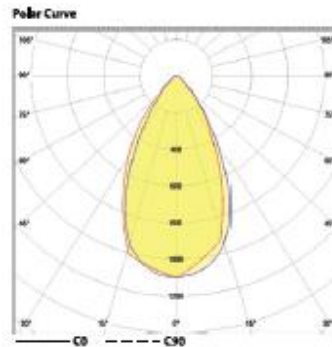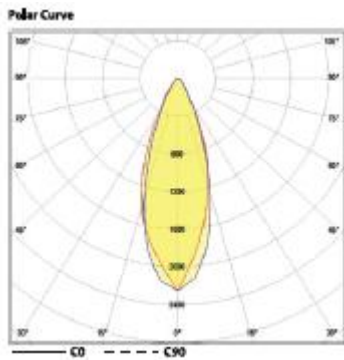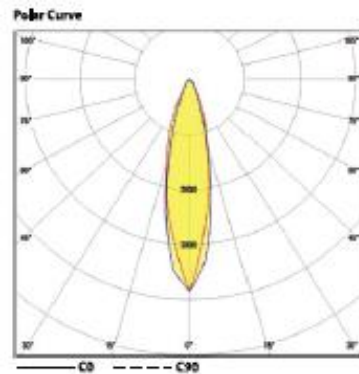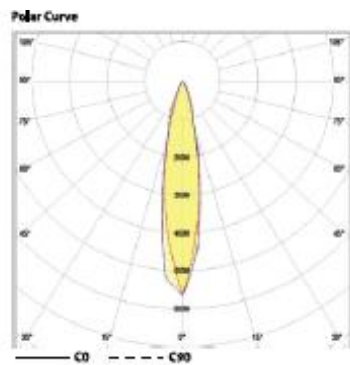


## TECHNICAL DATA


Code	Wattage	Luminous Flux (lm)				Size ( $\varnothing$ X H) mm
		2700K	3000K	4000K	6000K	
DOUP-R6	2X5W	800	820	840	860	65 X 180
DOUP-R6	2X7W	1120	1148	1176	1204	65 X 180
DOUP-R6	2X10W	1600	1630	1660	1690	65 X 180
DOUP-R9	2X15W	2400	2440	2480	2420	90 X 260
DOUP-R10	2X20W	3200	3250	3300	3350	108 X 280

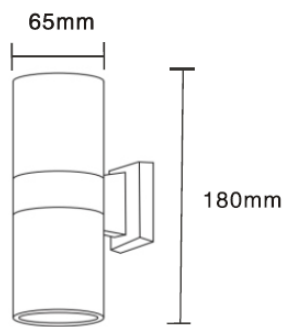

R6

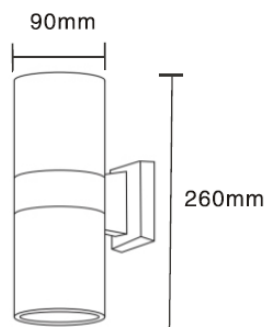

R9

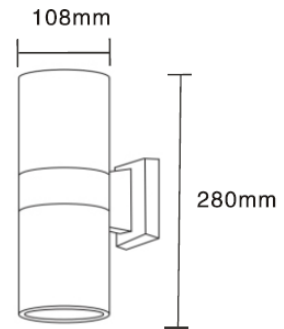

R10

## ORDER INFORMATION

Product Code	X	YY	ZZ
BLU-DOUP-R6-2X5W/7W	8 - CRI 83+	27 -2700K	15 - 15 Deg
BLU-DOUP-R6-2X10	9 - CRI 93+	30 -3000K	25 - 25 Deg
BLU-DOUP-R9-2X15W		40 -4000K	38- 38 Deg
BLU-DOUP-R10-2X20W		60 -6000K	60- 60 Deg

Example: BLU-DOUP-R6-2X5W-827-15

Luminous Efficacy	> 80lm/W
SDCM	<3
CRI	>83/93
Beam Angle	15°/25°/38°/60°
Working Voltage	220-240V AC
LED Driver	Integral
Control	Switched
Body Material	Die Cast Aluminium
Diffuser	Tempered Glass
IP Rating	IP65
Working Temperature	-20°C to 50°C
Rated Life	50,000Hrs (L70)

Specification subject to change without notice