
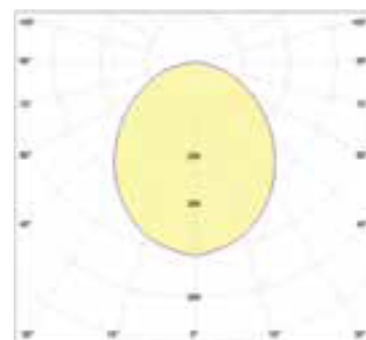



PHOBOS AC

IP65 Ceiling Light

IK02



IP Rating



LED



Beam Angle



Base Material



CE



RoHS



Rated Life



Warranty

Key Features:

- Made from Aluminium ensuring durability and a sleek finish.
- IP65 rated, protecting against dust and water ingress.
- Designed to operate in temperatures ranging from -20°C to 50°C.
- Integral LED Driver
- Rated life at 50,000Hrs (L70)
- 100° / 120° Beam Angle

Luminous Efficacy	105lm/W	Control	Switched
SDCM	<3	Body Material	Aluminium
CRI	>83/93	Optics	Polycarbonate
Beam Angle	100°/120°	IP Rating	IP65
Power Factor	>0.95	Working Temp	-20°C to 50°C
Working Voltage	220-240 VAC, 50/60Hz	Rated Life	50,000Hrs (L70)

PHOBOS AC

IP65 Ceiling Light

Technical Data

Product Code	Wattage	Luminous Flux				Size (Ø X H) mm
		2700K	3000K	4000K	6000K	
BLU-PHOB-AC	15W	1580	1600	1620	1640	170 X 36
BLU-PHOB-AC	25W	2625	2665	2705	2745	170 X 36
BLU-PHOB-AC	30W	2900	3000	3100	3200	230 X 36
BLU-PHOB-AC	32W	3360	3400	3440	3480	230 X 36

Ordering Code:

Product Code	X	YY	ZZ
BLU-PHOB-AC-15W	8 - CRI 83+	27 -2700K	IP65 - IP65
BLU-PHOB-AC-25W	9 - CRI 93+	30 -3000K	
BLU-PHOB-AC-30W		40 -4000K	
BLU-PHOB-AC-32W		60 -6000K	

Example: BLU-PHOB-AC-15W-827-IP65

Typical Applications:



Homes



Offices



Commercial



Malls



Schools



Hospitals



Hotels

Our products use the following LED Chips

LED Chips:

CREE LED

OSRAM

bridgelux
Bridging Light and Life™

SAMSUNG

CITIZEN™

LED Drivers:

TRIDONIC

V5 LIGHTING SOLUTIONS

FULHAM
Advanced LED Technology

Helvar