

### TECHNICAL DATA

Product Code	<i>BLU-ADAPT</i>
Body Material	<i>Die-cast Aluminium</i>
Adjustability	<i>Adjustable</i>
Dimension	<i>D 90mm X H 23mm</i>
Cut out	<i>D 75 mm</i>
IP Rating	<i>IP40</i>
Working Temperature	<i>-20°C to 40°C</i>
Finish	<i>White / Black</i>






ADAPT Frame is Suitable for BLUi MOD LED Engines.

### ORDER INFORMATION

Product Code	X	YY
BLU-ADAPT	W - White B - Black	IP20 – IP20

Example: BLU-ADAPT-W-IP20

*Specification subject to change without notice*

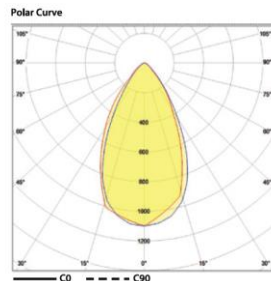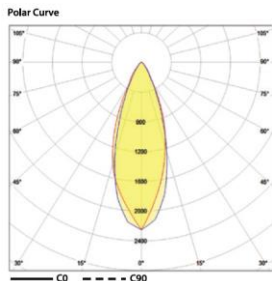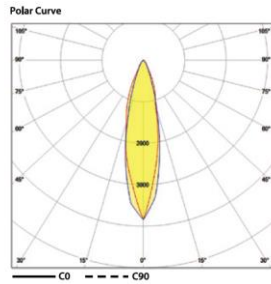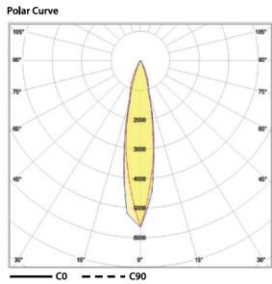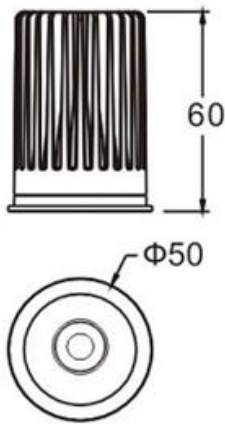

## TECHNICAL DATA

Product Code	BLU-MOD		
Wattage	6W / 8W / 10W		
Luminous Flux	<b>6W</b>	<b>8W</b>	<b>10W</b>
	2700K – 565lm	755lm	900lm
	3000K – 575lm	770lm	925lm
	4000K – 590lm	785lm	950lm
	5000K – 600lm	800lm	975lm
Luminous Efficacy	> 90lm/W		
SDCM	<3		
CRI	83/93		
Beam Angle	15° / 24° / 38°/60°		
Working Voltage	36 VDC		
LED Driver	Remote		
Control	Switched/ PHASE / 1-10V / DALI		
Body Material	Die-cast Aluminium		
Optics	PMMA		
IP Rating	IP40		
Working Temperature	-20°C to 40°C		
Rated Life	50,000Hrs (L70)		

**IK02**

## ORDER INFORMATION

Product Code	X	YY	ZZ
BLU-MOD-6W	8 - CRI 83	27 – 2700K	15 - 15°
BLU-MOD-8W	9 - CRI 93	30 – 3000K	24 - 24°
BLU-MOD-10W		40 – 4000K	38 - 38°
		50 – 5000K	60 - 60°

Example: BLU-MOD-6W-827-15

Specification subject to change without notice