


# PLANE R S

Surface Mounted Linear Light

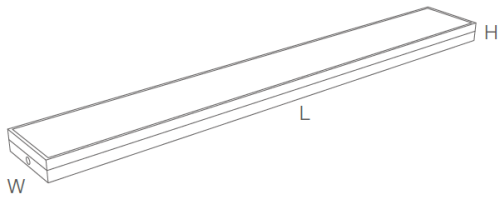

## TECHNICAL DATA

<i>Product Code</i>	BLU-PLANE-R-S		
<i>Wattage</i>	30W/36W/40W		
<i>Luminous Flux</i>	<b>22W</b>	<b>36W</b>	<b>40W</b>
	2700K - 2420lm	3960lm	4400lm
	3000K - 2456lm	4020lm	4450lm
	4000K - 2505lm	4100lm	4510lm
<i>Luminous Efficacy</i>	6000K - 2536lm	4150lm	4570lm
	>100lm/W; >140 lm/W available on request (PLANE-R-S-HE) High efficeancy		
<i>SDCM</i>	<3		
<i>CRI</i>	>83/93		
<i>UGR</i>	< 19		
<i>Beam Angle</i>	120°		
<i>Size</i>	L1200 X W200 X H64		
<i>Input Voltage</i>	230-240 VAC		
<i>LED Driver</i>	Integral		
<i>Control</i>	Switched/0-10V/DALI		
<i>Body Material</i>	Aluminum Housing		
<i>Diffuser</i>	PC		
<i>IP Rating</i>	IP40		
<i>Working Temperature</i>	-15°C to 40°C		
<i>Rated Life</i>	50,000Hrs (L80)		
	<b>IK02</b>		

## ORDER INFORMATION

<b>Product Code</b>	<b>XX</b>	<b>YY</b>	<b>ZZ</b>	<b>AA</b>
BLU-PLANE-R-S	0.6X4	30W	8 – 83 Ra	27 – 2700K
BLU-PLANE-R-S-HE		36W	9 – 93 Ra	30 – 3000K
		40W		40 – 4000K
				60 – 6000K

Example: BLU-PLANE-R-S-0.6X4-30W-827

Specification subject to change without notice