



Front



Back






Side

## TECHNICAL DATA

| Product Code | Wattage | Luminous Flux |       |       |       | Size           |
|--------------|---------|---------------|-------|-------|-------|----------------|
|              |         | 3000K         | 4000K | 5000K | 6000K | L x W x H (mm) |
| BLU-AXIS     | 50W     | 6750          | 7000  | 7250  | 7500  | 525 x 179 x 85 |
| BLU-AXIS     | 100W    | 13500         | 14000 | 14500 | 15000 | 525 x 214 x 85 |
| BLU-AXIS     | 120W    | 16200         | 16800 | 17400 | 18000 | 525 x 214 x 85 |
| BLU-AXIS     | 150W    | 20250         | 21000 | 21750 | 22500 | 624 x 214 x 85 |
| BLU-AXIS     | 200W    | 27000         | 28000 | 29000 | 30000 | 628 x 263 x 85 |

|                            |   |
|----------------------------|---|
| <i>SDCM</i>                | <5  |
| <i>CRI</i>                 | >73/83  |
| <i>Luminous Efficacy</i>   | >135lm/W; 165lm/W option available upon request |
| <i>Beam Angle</i>          | Type II / Type III / Type V                     |
| <i>Working Voltage</i>     | 220-240 VAC, 50/60Hz                            |
| <i>LED Driver</i>          | Integral  |
| <i>Power Factor</i>        | >0.95   |
| <i>Control</i>             | Switched / 1-10V / DALI                         |
| <i>Body Material</i>       | Die-cast Aluminium                              |
| <i>Optics</i>              | PMMA  |
| <i>IP Rating</i>           | IP66  |
| <i>IK Rating</i>           | IK10  |
| <i>Working Temperature</i> | -30°C to +55°C                                  |
| <i>Rated Life</i>          | 100,000+ Hrs                                    |

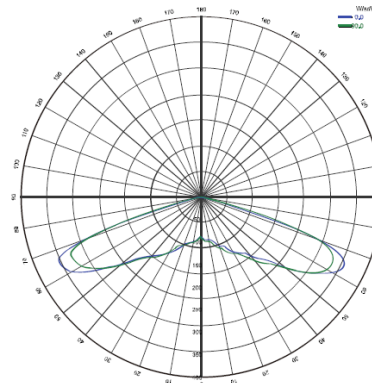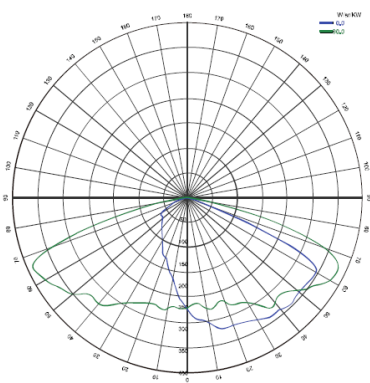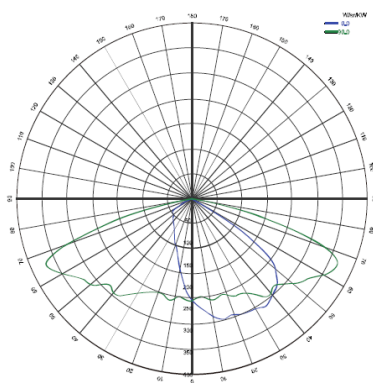

Slip Fitter



Round Pole Mount



Square Pole/Wall Mount



Wall-Mount



U-Bracket

## ORDER INFORMATION

| Product Code  | X           | YY         | ZZ                |
|---------------|-------------|------------|-------------------|
| BLU-AXIS-50W  | 7 - CRI 73+ | 30 - 3000K | TY II – Type II   |
| BLU-AXIS-100W | 8 - CRI 83+ | 40 - 4000K | TY III – Type III |
| BLU-AXIS-120W |             | 50 - 5000K | TY V – Type V     |
| BLU-AXIS-150W |             | 60 - 6000K |                   |
| BLU-AXIS-200W |             |            |                   |

Example: BLU-AXIS-50W-830-TY II

Specification subject to change without notice