
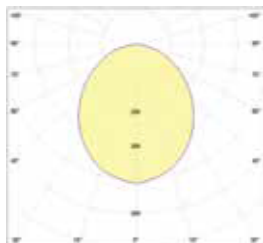


Flex-i FS

Flexible Strip

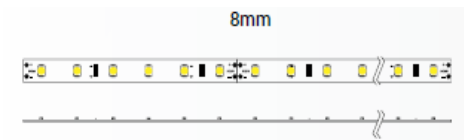

TECHNICAL DATA

<i>Product Code</i>	BLU-FLEXI-FS	
<i>Wattage</i>	4.8W / 9.6W	
<i>Luminous Flux</i>	4.8W	9.6W
	2700K – 395lm	775lm
	3000K – 400lm	790lm
	4000K – 410lm	805lm
	6000K – 420lm	820lm
<i>Luminous Efficacy</i>	>80lm/W	
<i>SDCM</i>	<3	
<i>CRI</i>	>95	
<i>Beam Angle</i>	120°	
<i>Working Voltage</i>	24 VDC	
<i>LED Driver</i>	Remote	
<i>Control</i>	Switched / 1-10V /DALI	
<i>Body Material</i>	Epoxy IP65, Silicone IP67	
<i>Optics</i>	No Secondary Optics	
<i>IP Rating</i>	IP20 / IP65 / IP67	
<i>Working Temperature</i>	-20°C to 40°C	
<i>Rated Life</i>	50,000Hrs (L70)	

ORDER INFORMATION

Product Code	X	YY	ZZ
BLU-FLEXI-FS-4.8W	9 - CRI 95+	27 - 2700K	IP20
BLU-FLEXI-FS-9.6W		30 - 3000K	IP65
		40 - 4000K	IP67
		60 - 6000K	

Example: BLU-FLEXI-FS-4.8W-927-IP20

Specification subject to change without notice