
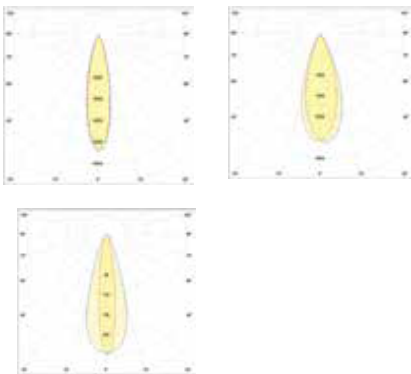
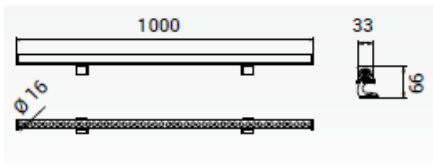


# Greenline 33

Outdoor Series

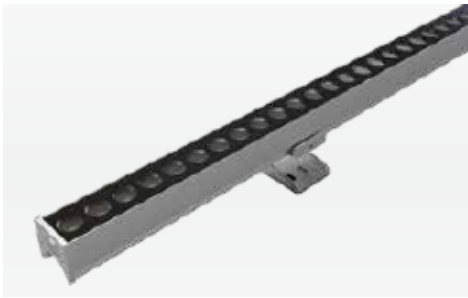

## TECHNICAL DATA

|                            |  |
|----------------------------|--|
| <i>Product Code</i>        | BLU-GLINE-33   |
| <i>Wattage</i>             | 12W  |
| <i>Luminous Flux</i>       | 2700K – 1055lm<br>3000K – 1070lm<br>4000K – 1085lm<br>6000K – 1100lm |
| <i>Luminous Efficacy</i>   | >85lm/W  |
| <i>SDCM</i>                | <4   |
| <i>CRI</i>                 | >83/93   |
| <i>Beam Angle</i>          | 30°/40°  |
| <i>Working Voltage</i>     | 24 VDC   |
| <i>LED Driver</i>          | Remote   |
| <i>Control</i>             | Switched / 1-10V / DALI / DMX / SPI                                  |
| <i>Body Material</i>       | Extruded Aluminium   |
| <i>Optics</i>              | PMMA with tempered glass cover                                       |
| <i>IP Rating</i>           | IP66   |
| <i>Working Temperature</i> | -20°C to 50°C  |
| <i>Rated Life</i>          | 50,000Hrs (L70)  |

## ORDER INFORMATION

| <b>Product Code</b> | <b>X</b>    | <b>YY</b>  | <b>ZZ</b>   |
|---------------------|-------------|------------|-------------|
| BLU-GLINE-33-12W    | 8 - CRI 83+ | 27 - 2700K | 30 - 30 Deg |
|                     | 9 - CRI 93+ | 30 - 3000K | 40 - 40 Deg |
|                     |             | 40 - 4000K |             |
|                     |             | 60 - 6000K |             |

Example: BLU-GLINE-33-12W-827-30

Specification subject to change without notice