


Boulevard 1

Outdoor Series

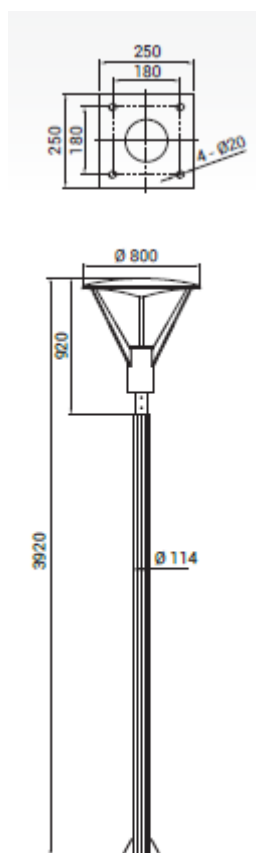

TECHNICAL DATA

<i>Product Code</i>	BLU-BLVD1
<i>Wattage</i>	40W
<i>Luminous Flux</i>	2700K – 2640lm 3000K – 2690lm 4000K – 2745lm 6000K – 2800lm
<i>Luminous Efficacy</i>	>70lm/W
<i>SDCM</i>	<4
<i>CRI</i>	>80
<i>Power Factor</i>	>0.95
<i>Working Voltage</i>	100-240 VAC, 50/60Hz
<i>LED Driver</i>	Integral
<i>Control</i>	Switched
<i>Body Material</i>	Aluminium with anticorrosion treatment
<i>Optics</i>	Anodized aluminium
<i>IP Rating</i>	IP65
<i>Working Temperature</i>	-20°C to 50°C
<i>Rated Life</i>	50,000Hrs (L70)

ORDER INFORMATION

Product Code	X	YY
BLU-BLVD1-40W-827	8 - CRI 80+	27 - 2700K 30 - 3000K 40 - 4000K 60 - 6000K

Example: BLU-BLVD1-40W-827

Specification subject to change without notice