




TECHNICAL DATA

<i>Product Code</i>	BLU-STKD		
<i>Wattage</i>	7W / 9W / 12W		
<i>Luminous Flux</i>	7W	9W	12W
	2700K – 470lm	570lm	805lm
	3000K – 480lm	580lm	820lm
	4000K – 490lm	590lm	835lm
	6000K – 500lm	600lm	850lm
<i>Luminous Efficacy</i>	>70lm/W		
<i>SDCM</i>	<4		
<i>CRI</i>	>80		
<i>Power Factor</i>	>0.95		
<i>Working Voltage</i>	100 – 240V AC, 50/60Hz		
<i>LED Driver</i>	Integral		
<i>Control</i>	Switched		
<i>Body Material</i>	Aluminium with anticorrosion treatment		
<i>Optics</i>	PC diffuser		
<i>IP Rating</i>	IP65		
<i>Working Temperature</i>	-20°C to 50°C		
<i>Rated Life</i>	50,000Hrs (L70)		

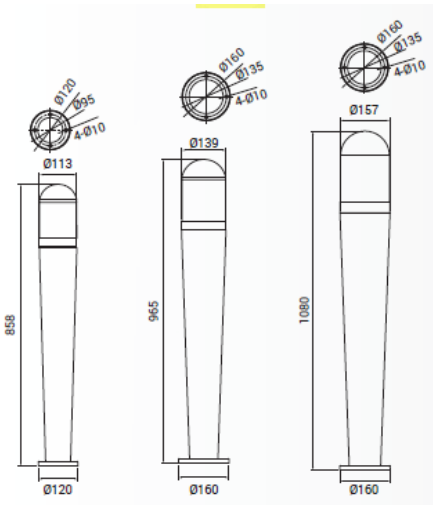

ORDER INFORMATION

Product Code	X	YY
BLU-STKD-7W	8 - CRI 80+	27 - 2700K
BLU-STKD-9W		30 - 3000K
BLU-STKD-12W		40 - 4000K
		60 - 6000K

Example: BLU-STKD-7W-827

Specification subject to change without notice