Spear R7

Outdoor Series

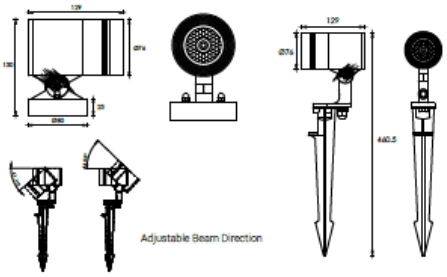

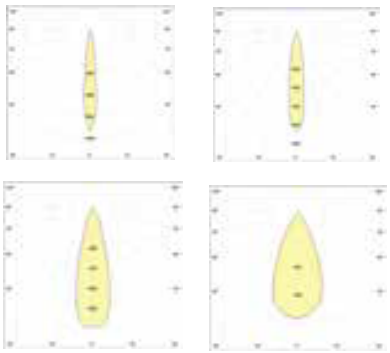

TECHNICAL DATA

Product Code	BLU-SPEAR-R7B
Wattage	12W
Luminous Flux	2700K – 1070lm 3000K – 1080lm 4000K – 1090lm 6000K – 1100lm
Luminous Efficacy	>80lm/W
SDCM	<3
CRI	>83
Beam Angle	15°/24°/38°/60°
Power Factor	>0.95
Working Voltage	200-240 VAC, 50/60Hz
LED Driver	Integral
Control	Switched
Body Material	Die-cast Aluminium
Optics	Multifaceted reflector with tempered glass cover
IP Rating	IP66
Working Temperature	-20°C to 50°C
Rated Life	50,000Hrs (L70)

ORDER INFORMATION

Product Code	X	YY	ZZ
BLU-SPEAR-R7B-12W	8 - CRI 83+	27 - 2700K	15 - 15Deg
		30 - 3000K	24 - 24Deg
		40 - 4000K	38 - 38Deg
		60 - 6000K	60 - 60Deg

Example: BLU-SPEAR-R7B-12W-827-15

Specification subject to change without notice

Suite 5, Valley Towers, Valley Road
Birkirkara BKR9022, Malta
www.immitek.com

Imminent Teknologies LLC

811 Regal Tower, Business Bay
Dubai, United Arab Emirates
www.bluilighting.com