


TECHNICAL DATA

<i>Product Code</i>	BLU-RHINO-R22
<i>Wattage</i>	45W
<i>Luminous Flux</i>	2700K – 2183lm 3000K – 2205lm 4000K – 2227lm 6000K – 2250lm
<i>Luminous Efficacy</i>	>40lm/W
<i>SDCM</i>	<3
<i>CRI</i>	>83
<i>Beam Angle</i>	20°/25°/30°/35°/45°
<i>Working Voltage</i>	24VDC, 50/60Hz
<i>LED Driver</i>	Integral
<i>Control</i>	Switched
<i>Body Material</i>	Hard chrome plated moulding shaped stainless steel
<i>Optics</i>	Multifaceted reflector with tempered glass cover
<i>IP Rating</i>	IP68
<i>Working Temperature</i>	-20°C to 50°C
<i>Rated Life</i>	50,000Hrs (L70)

ORDER INFORMATION

Product Code	X	YY	ZZ
BLU-RHINO-R22-45W	8 - CRI 83+	27 - 2700K 30 - 3000K 40 - 4000K 60 - 6000K	20 - 20Deg 25 - 25Deg 30 - 30Deg 35 - 35Deg 45 - 45Deg

Example: BLU-RHINO-R22-45W-827-20

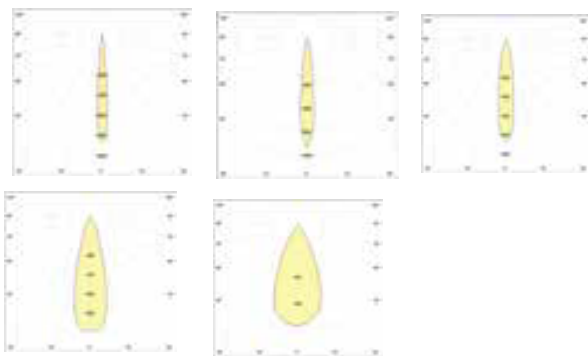

Specification subject to change without notice