


H=63mm

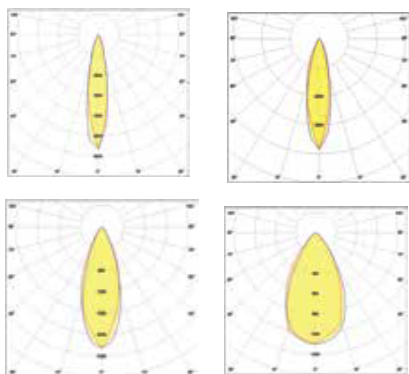

### TECHNICAL DATA

|                     |                               |        |
|---------------------|-------------------------------|--------|
| Product Code        | BLU-COMFY-A-8                 |        |
| Wattage             | 10W & 12W                     |        |
| Luminous Flux       | 10W                           | 12W    |
|                     | 2700K – 980lm                 | 1180lm |
|                     | 3000K – 1000lm                | 1200lm |
|                     | 4000K – 1020lm                | 1220lm |
|                     | 5000K – 1040lm                | 1240lm |
| Luminous Efficacy   | >95lm/W                       |        |
| SDCM                | <3                            |        |
| CRI                 | >83/93                        |        |
| Beam Angle          | 15°/24°/38°/60°               |        |
| Working Voltage     | 36 VDC                        |        |
| Cut out             | 75mm                          |        |
| LED Driver          | Remote                        |        |
| Control             | Switched / 1-10V / DALI       |        |
| Body Material       | Die-cast Aluminium            |        |
| Optics              | PMMA with Aluminium Reflector |        |
| IP Rating           | IP40                          |        |
| Working Temperature | -20°C to 40°C                 |        |
| Rated Life          | 50,000Hrs (L70)               |        |

### ORDER INFORMATION

| Product Code      | X           | YY         | ZZ          |
|-------------------|-------------|------------|-------------|
| BLU-COMFY-A-8-10W | 8 - CRI 83+ | 27 - 2700K | 15 - 15 Deg |
| BLU-COMFY-A-8-12W | 9 - CRI 93+ | 30 - 3000K | 24 - 24 Deg |
|                   |             | 40 - 4000K | 38 - 38 Deg |
|                   |             | 50 - 5000K | 60 - 60 Deg |

Example: BLU-COMFY-A-8-10W-827-15

Specification subject to change without notice