
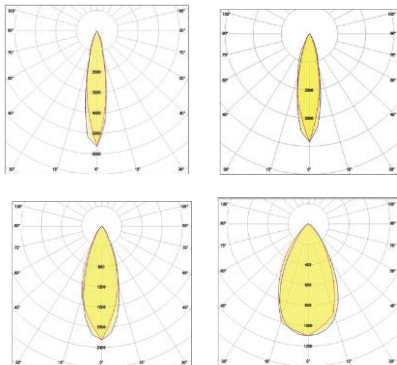


DEEP 2

TWIN ADJUSTABLE SPOT

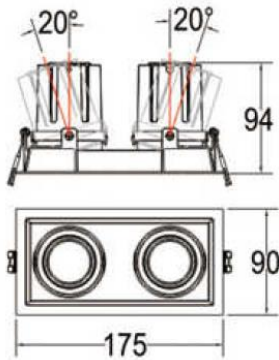

TECHNICAL DATA

| | | |
|---------------------|-------------------------|--------|
| Product Code | BLU-DEEP2 | |
| Wattage | 2X13W / 2X15W | |
| Luminous Flux | 2X13W | 2X15W |
| 2700K – | 2570lm | 2770lm |
| 3000K – | 2600lm | 2800lm |
| 4000K – | 2630lm | 2830lm |
| 5000K – | 2660lm | 2860lm |
| Luminous Efficacy | >90lm/W | |
| SDCM | <3 | |
| CRI | >83/93 | |
| Beam Angle | 15°/20°/24°/30°/38°/55° | |
| Working Voltage | 36 VDC | |
| LED Driver | Remote | |
| Control | Switched / 1-10V / DALI | |
| Body Material | Die-cast Aluminium | |
| Optics | PMMA Lens | |
| IP Rating | IP40 | |
| Working Temperature | -20°C to 40°C | |
| Rated Life | 50,000Hrs (L70) | |

ORDER INFORMATION

| Product Code | X | YY | ZZ |
|-----------------|-------------|------------|----------|
| BLU-DEEP2-2X13W | 8 - CRI 83+ | 27 - 2700K | 15 - 15° |
| BLU-DEEP2-2X15W | 9 - CRI 93+ | 30 - 3000K | 20 - 20° |
| | | 40 - 4000K | 24 - 24° |
| | | 60 - 6000K | 30 - 30° |
| | | | 38 - 38° |
| | | | 55 - 55° |

Example: BLU-DEEP2-2X13W-827-15

Specification subject to change without notice