



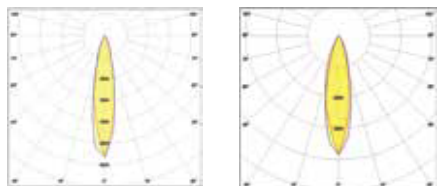


DART

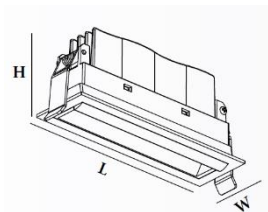

DART W (Wall Wash)

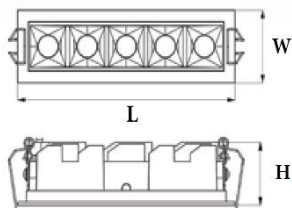

TECHNICAL DATA

Code	Wattage	Luminous Flux				Size (L X W X H)mm	Cut out (mm)
		2700K	3000K	4000K	5000K		
BLU-DART-5	12W	980	1005	1030	1080	148 X 45 X 39	140 X 37
BLU-DART-10	23W	1970	1995	2020	2070	280 X 45 X 39	273 X 37
BLU-DART-15	35W	3050	3075	3100	3150	413 X 45 X 39	405 X 37
BLU-DART-W	12W	980	1005	1030	1080	135 X 42 X 58	128 X 35
BLU-DART-W2	23W	1970	1995	2020	2070	255 X 42 X 58	248 X 35

Luminous Efficacy

SDCM

CRI

Beam Angle

Working Voltage

LED Driver

Control

Body Material

Optics

IP Rating

Working Temperature

Rated Life

>80lm/W

<3

>83/93

15°/30°/45°/Wall Wash

15 /30 /45 VDC

Remote

Switched / 1-10V / DALI

Die-cast Aluminium

PMMA

IP40

-20°C to 40°C

50,000Hrs (L70)

ORDER INFORMATION

Product Code	X	YY	ZZ
BLU-DART-5-12W	8 - CRI 83+	27 -2700K	15 - 15 Deg
BLU-DART-10-23W	9 - CRI 93+	30 -3000K	30 - 30 Deg
BLU-DART-15-35W		40 -4000K	45 - 45 Deg
BLU-DART-W-12W		50 -5000K	WW - Wall Wash
BLU-DART-W2-23W			

Example: BLU-DART-5-12W-827-15

Specification subject to change without notice