
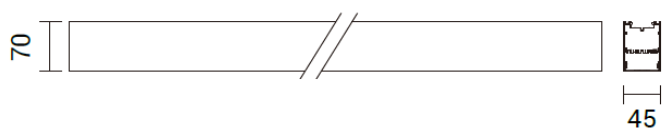



DASH UD 4

Linear Series (Direct / In Direct)

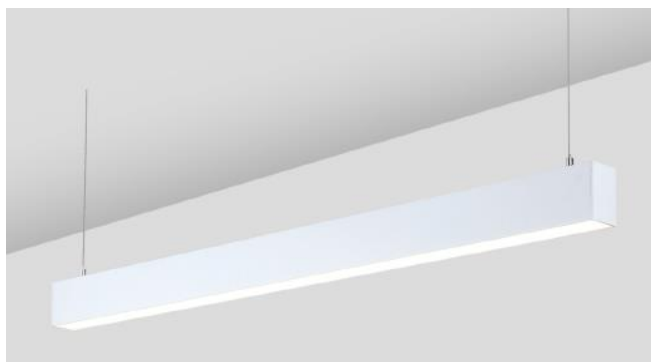

Length Options:

570mm, 850mm, 1130mm, 1690mm, 2000mm, 2250mm

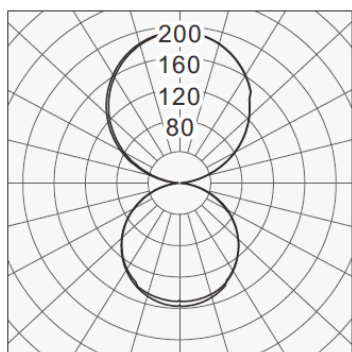

TECHNICAL DATA

Product Code	BLU-DASH-UD-4
Wattage	54W (1130 mm)
Luminous Flux	2700K – 5150lm 3000K – 5200lm 4000K – 5250lm 6000K – 5300lm
Luminous Efficacy	>95lm/W
SDCM	<3
CRI	>83/93
Beam Angle	120°
Power Factor	>0.95
Working Voltage	220-240V AC, 50/60Hz
LED Driver	Integral
Control	Switched/1-10/DALI
Body Material	Extruded Aluminium
Optics	PMMA Diffuser
IP Rating	IP40
Working Temperature	-20°C to 40°C
Rated Life	50,000Hrs (L70)

ORDER INFORMATION

Product Code	X	YY	ZZ
BLU-DASH-UD-4-57-27W	8 - CRI 83+	27 - 2700K	IP40 – IP40
BLU-DASH-UD-4-85-40W	9 - CRI 93+	30 - 3000K	
BLU-DASH-UD-4-113-54W		40 - 4000K	
BLU-DASH-UD-4-169-81W		60 - 6000K	
BLU-DASH-UD-4-200-96W			
BLU-DASH-UD-4-225-108W			

Example: BLU-DASH-UD-4-113-54W-840

Specification subject to change without notice