
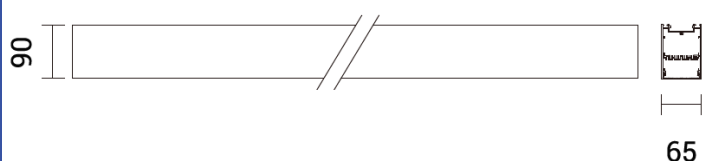



DASH UD 6

Linear Series (Direct / In Direct)

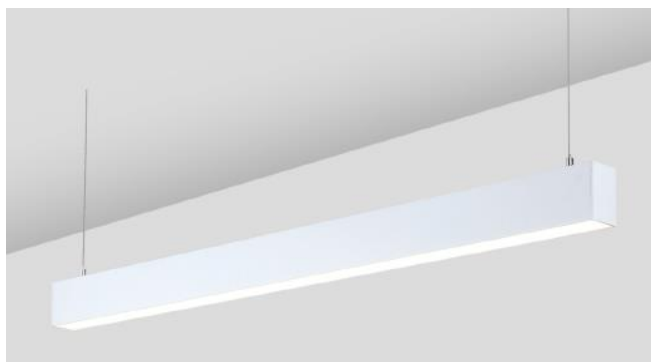

Length Options:

570mm, 850mm, 1130mm, 1690mm, 2000mm, 2250mm

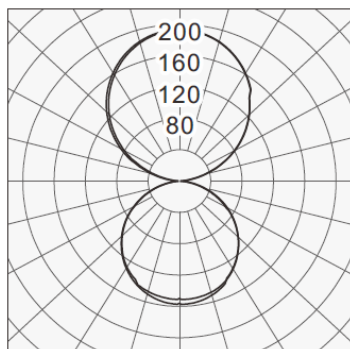

TECHNICAL DATA

<i>Product Code</i>	BLU-DASH-UD-6
<i>Wattage</i>	54W (1130 mm)
<i>Luminous Flux</i>	2700K – 5150lm 3000K – 5200lm 4000K – 5250lm 6000K – 5300lm
<i>Luminous Efficacy</i>	>95lm/W
<i>SDCM</i>	<3
<i>CRI</i>	>83/93
<i>Beam Angle</i>	120°
<i>Power Factor</i>	>0.95
<i>Working Voltage</i>	220-240V AC, 50/60Hz
<i>LED Driver</i>	Integral
<i>Control</i>	Switched/1-10/DALI
<i>Body Material</i>	Extruded Aluminium
<i>Optics</i>	PMMA Diffuser
<i>IP Rating</i>	IP40
<i>Working Temperature</i>	-20°C to 40°C
<i>Rated Life</i>	50,000Hrs (L70)

ORDER INFORMATION

Product Code	X	YY	ZZ
BLU-DASH-UD-6-57-27W	8 - CRI 83+	27 - 2700K	IP40 – IP40
BLU-DASH-UD-6-85-40W	9 - CRI 93+	30 - 3000K	
BLU-DASH-UD-6-113-54W		40 - 4000K	
BLU-DASH-UD-6-169-81W		60 - 6000K	
BLU-DASH-UD-6-200-96W			
BLU-DASH-UD-6-225-108W			

Example: BLU-DASH-UD-6-113-54W-840

Specification subject to change without notice