


GAIN 11



GAIN 19 & GAIN 22

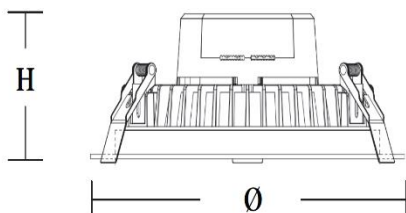

TECHNICAL DATA

Code	Wattage	Luminous Flux				Size (Ø X H)mm	Cut out (mm)
		2700K	3000K	4000K	6000K		
BLU-GAIN-11	8W	705	730	755	790	110 X 74	90
BLU-GAIN-11	10W	880	910	940	970	110 X 74	90
BLU-GAIN-11	12W	1060	1090	1120	1150	110 X 74	90
BLU-GAIN-19	12W	1060	1090	1120	1150	190 X 77	160
BLU-GAIN-19	15W	1320	1350	1380	1410	190 X 77	160
BLU-GAIN-19	20W	1760	1790	1820	1850	190 X 77	160
BLU-GAIN-19	25W	2200	2230	2260	2290	190 X 77	160
BLU-GAIN-22	25W	2200	2230	2260	2290	228 X 77	200
BLU-GAIN-22	30W	2650	2680	2710	2740	228 X 77	200
BLU-GAIN-22	36W	3200	3230	3260	3290	228 X 77	200

Luminous Efficacy

>85lm/W

SDCM

<3

CRI

>83/93

Beam Angle

90°

Working Voltage

100-240 VAC, 50/60Hz

LED Driver

Integral / Remote

Control

Switched / 1-10V / DALI

Body Material

Die-cast Aluminium

Diffuser

Polycarbonate

IP Rating

IP44

Working Temperature

-20°C to 40°C

Rated Life


50,000Hrs (L70)

Special Feature: Fixture with Adjustable CCT supply options 3000/4000/6000K

ORDER INFORMATION

Product Code	X	YY	ZZ
BLU-GAIN-11-8W / 10W	8 - CRI 83+	27 -2700K	IP44 - IP44
BLU-GAIN-19-12W/15W/20W/25W	9 - CRI 93+	30 -3000K	
BLU-GAIN-22-25W/30W/36W		40 -4000K	
		60 -6000K	

Example: BLU-GAIN-11-8W-827-IP44



Specification subject to change without notice