



Ref. No.: LCZF19080146

Version: 1.0

Date of issue: Aug. 27, 2019

Total pages: 11



Test report of

## IES LM-79-08

Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Rendered to:

Imminent Teknologies Limited  
Suite 5, Valley Towers, Valley Road, Birkirkara BKR9022, Malta

For products:

LED LINEAR LIGHT

Models No.:

BLU-DASH-6-840-36W

**Test Date:** Aug. 23, 2019 to Aug. 24, 2019

**Test Lab.:** **LCTECH (Zhongshan) Testing Service Co., Ltd**

2/F., Building II, Technology and Enterprise Development Center, Guangyuan Road,  
Xiaolan, Zhongshan, Guangdong, China

Tel: +86-760-22833366 Fax: +86-760-22833399

E-mail: [Service@lccert.com](mailto:Service@lccert.com) <http://www.lccert.com>

**Test Sites:** 1/F., Building I, Technology and Enterprise Development Center, Guangyuan Road,  
Xiaolan, Zhongshan, Guangdong, China

**Template No.:** LC-RT-PL-001 Rev.1.2

**Test Note:**

---

**Complied by:**

**Kargel Yuan**  
**Project Engineer**  
**Aug. 27, 2019**

**Reviewed by:**

**Lin Qiu**  
**Technical Manager**  
**Aug. 27, 2019**

---

The duplication of this report or parts of it and its use for advertising purposes is only allowed with permission of the testing laboratory. This report contains the result of the examination of the product sample submitted by the applicant. A general statement concerning the quality of the products from the series manufacture cannot be derived therefore. This report must not be used by the customer to claim product certification, approval or endorsement by NVLAP, NIST, or any agency of the Federal Government.



## Table of Contents

<b>1. General</b>	3
1.1 Product Information	3
1.2 Standards or methods	4
1.3 Equipment list	4
<b>2. Test conducted and method</b>	5
2.1 Ambient Condition	5
2.2 Power Supply Characteristics	5
2.3 Seasoning and Stabilization	5
2.4 Electrical Instrumentation	5
2.5 Color Measurement Method	5
2.6 Total Luminous Flux Measurement Method	5
2.7 Luminous Intensity Distribution Measurement Method	5
2.8 Spatial Non-uniformity of Chromaticity	5
<b>3. Test Result Summary</b>	6
3.1 Electrical data	6
3.2 Photometric data	6
3.3 Color Rendering Details	6
<b>4. Test Data</b>	7
4.1 Spectral Distribution	7
4.2 ANSI Chromaticity Quadrangles Diagram	7
4.3 Goniometry Test Data	8
4.4 Zonal Lumen Summary	8
4.5 Polar Curves	9
4.6 Candela Tabulation	10
<b>Appendix A Product Photo</b>	11



LCTECH



## 1. General

### 1.1 Product Information

Brand Name	BLUi
Product Type	LED LINEAR LIGHT
Model Number	BLU-DASH-6-840-36W
Rated Inputs	220-240VAC, 50/60Hz
Rated Power	36W
Rated Light output	3530lm
Declared CCT	4000K
Power Supply	Integrated in luminaire
LED Package, Array or Module	OSRAM
Receipt Samples	1 unit
Sample Code of lab.	190822104001
Date of Receipt Samples	Aug. 22, 2019
Note	-

## 1.2 Standards or methods

The following standards are partly or totally used or referenced for test:

No.	Name
ANSI/NEMA/ ANSLG C78.377-2011 or 2015 or 2017	Specifications for the Chromaticity of Solid State Lighting Products
ANSI C82.77-2002	Harmonic Emission Limits—Related Power Quality Requirements for Lighting Equipment
CIE Pub. No. 13.3-1995	Method of Measuring and Specifying Color Rendering of Light Sources
CIE Pub. No. 15:2004	Colorimetry
IES LM-79-08	Electrical and Photometric Measurements of Solid-State Lighting Products

## 1.3 Equipment list

Instrument	ID	Model name	Cal. date	Next cal. Date
AC Power supply	LC-I-987	APW-120N	2019-01-08	2020-01-07
AC Power supply	LC-I-989	APW-120N	2019-01-08	2020-01-07
Power analyzer	LC-I-928	WT210	2019-01-02	2020-01-01
Power analyzer	LC-I-954	WT210	2019-01-08	2020-01-07
Multimeter	LC-I-972	Fluke 17B	2019-07-29	2020-07-28
Photometric colorimetric electric system* (2 meter sphere)	LC-I-956	HAAS-2000	Before use	Before use
Standard lamp**	LC-PL-I-011	D204C	2018-11-21	2019-11-20
Luminous Flux Standard Lamp***	LC-PL-I-003	24V100W	2018-11-21	2019-11-20
Goniophotometer(with mirror)	LC-I-902	GMS2000	2019-05-06	2020-05-05
Wireless temperature transmitter	LC-I-978	DWRF-B	2019-01-07	2020-01-06
Wireless temperature transmitter	LC-I-979	DWRF-B	2019-01-07	2020-01-06

Note:

\* Bandwidth of spectroradiometer is 1 nm.

\*\* halogen lamp, 100W, omni-directional type, and its traceability to NIM.

\*\*\* halogen lamp, 100W, omni-directional type, and its traceability to NIM.

## 2. Test conducted and method

The luminaire was operated at least 2 hours to reach stabilization and temperature equilibrium before test.

### 2.1 Ambient Condition

The ambient temperature in which measurements are being taken was maintained at  $25\text{ }^{\circ}\text{C} \pm 1\text{ }^{\circ}\text{C}$ ; the air flow around the sample(s) being tested did not affect the performance.

### 2.2 Power Supply Characteristics

The AC power supply had a sinusoidal voltage wave shape at the prescribed frequency (50 Hz) such that the RMS summation of the harmonic components does not exceed 3 percent of the fundamental during operation of the test item.

The voltage of AC power supply (RMS voltage) applied to the device under test was regulated to within  $\pm 0.2$  percent under load.

### 2.3 Seasoning and Stabilization

No seasoning was performed in accordance with IESNA LM-79-08. And before the measurement, the sample was stabilized until the light output and power variations were less than 0.5% in 30 minutes intervals (3 readings, 15 minutes apart).

### 2.4 Electrical Instrumentation

The calibration uncertainties of the instruments for AC voltage and current were less than 0.2 percent, and the calibration uncertainty of the AC power meter was less than 0.5 percent (95 % confidence interval,  $k=2$ ).

### 2.5 Color Measurement Method

Spectral radiant flux was measured by a sphere (2 meter)-spectroradiometer system, and the color characteristics (Color rendering index, correlated color temperature, chromaticity coordinate) were calculated from these by software automatically.

### 2.6 Total Luminous Flux Measurement Method

Total luminous flux was measured by type C goniophotometer system.

Light intensity distribution was measured by a type C goniophotometer (with mirror) which can keep the sample in burn position when the tests conduct, and the total luminous flux was calculated from the intensity data by software automatically.

### 2.7 Luminous Intensity Distribution Measurement Method

Luminous intensity distribution was measured by a mirror-type goniophotometer (Type C) which can keep the sample in burn position when the tests conduct, and the kinds of graph were generated by software automatically.

### 2.8 Spatial Non-uniformity of Chromaticity

The customer did not require this measurement.

### 3. Test Result Summary

#### 3.1 Electrical data

Criteria Item	Result(Sphere)	Result(Goniophotometer)
Input Voltage & Frequency	230.00 V~50Hz	230.02 V~50Hz
Input Current(A)	0.168	0.167
Total Power(W)	36.56	36.43
Power Factor	0.945	0.947
I-THD	-	-
Off-state Power(W)	-	-

#### 3.2 Photometric data

Criteria Item	Result(Sphere)	Result(Goniophotometer)
Total Lumens(lm)	-	3544.93
Luminaire Efficacy(Lm/W)	-	97.31
Correlated Color Temperature (CCT)(K)	3978	-
Color Rendering Index (CRI)	84.8	-
R9	16	-
Chromaticity Coordinate (x,y)	x = 0.3816 y = 0.3782	-
Chromaticity Coordinate (u,v)	u = 0.2253 v = 0.3349	-
Chromaticity Coordinate (u',v')	u' = 0.2253 v' = 0.5024	-
Duv	0.0003	-
Zone Lumens between 0-60 °	-	73.40%
Beam Angle(50%Imax)	-	C0/180=106.4° C90/270=108.5°


#### 3.3 Color Rendering Details

R1	R2	R3	R4	R5	R6	R7	R8
84	94	96	81	84	90	85	65
R9	R10	R11	R12	R13	R14	R15	-
16	84	80	65	87	98	78	-


Note: N/A

## 4. Test Data

### 4.1 Spectral Distribution

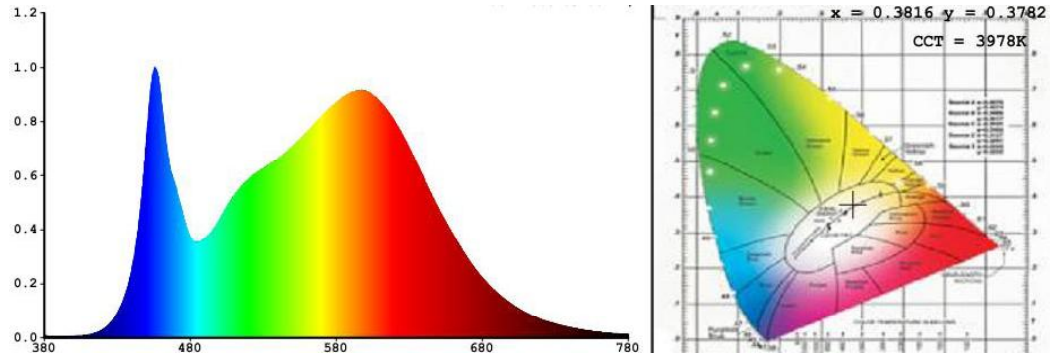

### 4.2 ANSI Chromaticity Quadrangles Diagram

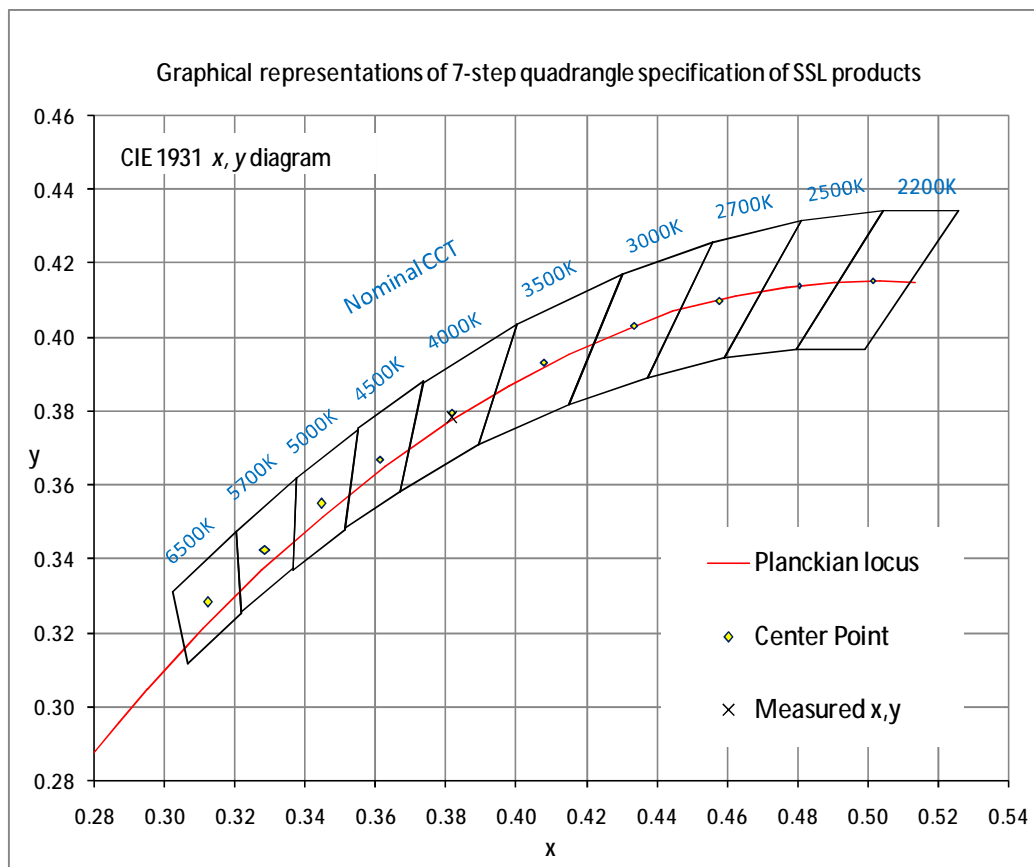



LCTECH



4.3 Goniometry Test Data

CIE Type	Direct	Basic Luminous Shape	Rectangular
Spacing Criteria (0-180)	1.24	Luminous Length	1.13 m
Spacing Criteria (90-270)	1.22	Luminous Width	0.05 m
Spacing Criteria (Diagonal)	1.34	Luminous Height	0.00 m
Test Distance	30.00 m		

4.4 Zonal Lumen Summary

Zone	Lumens	%Lamp	%Fixt
0-20	476.88	13.50	13.50
0-30	1003.42	28.30	28.30
0-40	1626.9	45.90	45.90
0-60	2827.68	79.80	79.80
0-80	3477.03	98.10	98.10
0-90	3530.47	99.60	99.60
10-90	3406.28	96.10	96.10
20-40	1150.02	32.40	32.40
20-50	1785.69	50.40	50.40
40-70	1621.55	45.70	45.70
60-80	649.35	18.30	18.30
70-80	228.58	6.40	6.40
80-90	53.44	1.50	1.50
90-110	4.12	0.10	0.10
90-120	5.75	0.20	0.20
90-130	7.37	0.20	0.20
90-150	10.54	0.30	0.30
90-180	14.46	0.40	0.40
110-180	10.34	0.30	0.30
0-180	3544.93	100.00	100.00

Total Luminaire Efficiency = 100.00%

ZONAL LUMEN SUMMARY


Zone	Lumens
0-10	124.19
10-20	352.69
20-30	526.54
30-40	623.48
40-50	635.68
50-60	565.10
60-70	420.78
70-80	228.58
80-90	53.44
90-100	2.31
100-110	1.81
110-120	1.63
120-130	1.62
130-140	1.53
140-150	1.65
150-160	1.81
160-170	1.50
170-180	0.61





LCTECH

4.5 Polar Curves

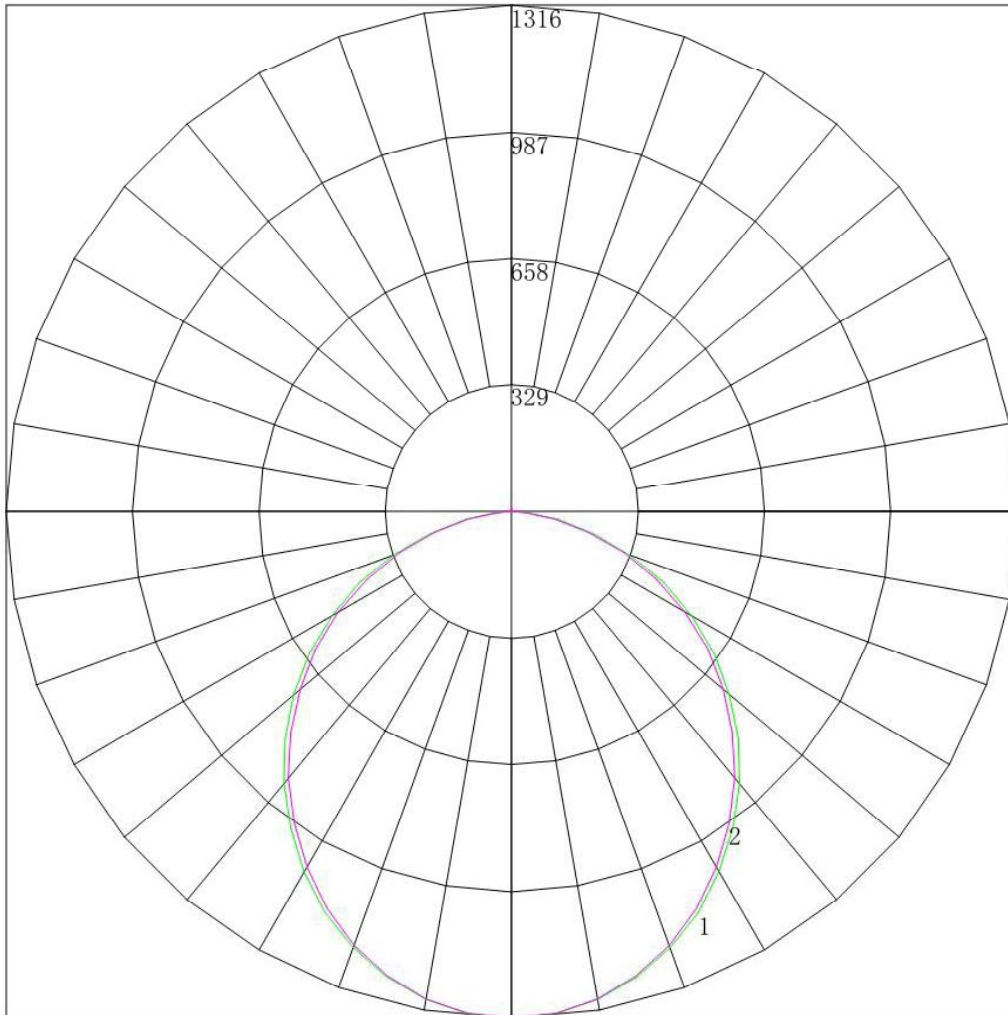

Maximum Candela = 1315.653 Located At Horizontal Angle = 0, Vertical Angle = 0


# 1 - Vertical Plane Through Horizontal Angles (0 - 180)

# 2 - Vertical Plane Through Horizontal Angles (90 - 270)


4.6 Candela Tabulation

	<u>0</u>	<u>15</u>	<u>30</u>	<u>45</u>	<u>60</u>	<u>75</u>	<u>90</u>
<b>0</b>	1315.653	1315.653	1315.653	1315.653	1315.653	1315.653	1315.653
<b>5</b>	1308.733	1308.310	1308.089	1308.726	1308.544	1307.995	1309.420
<b>10</b>	1288.242	1286.827	1286.413	1287.137	1285.265	1285.299	1285.876
<b>15</b>	1252.779	1252.770	1251.058	1251.397	1250.032	1247.980	1248.761
<b>20</b>	1205.917	1205.775	1204.195	1203.713	1201.287	1198.969	1199.327
<b>25</b>	1149.693	1146.725	1144.282	1145.035	1140.435	1137.712	1137.255
<b>30</b>	1080.214	1080.528	1076.100	1075.713	1070.253	1066.767	1065.350
<b>35</b>	1003.408	1004.892	999.646	999.106	991.999	987.395	987.482
<b>40</b>	921.762	921.551	916.756	914.283	909.918	905.258	903.794
<b>45</b>	833.241	833.558	828.886	823.930	819.731	815.584	812.449
<b>50</b>	739.970	738.227	733.504	731.038	724.795	721.212	718.565
<b>55</b>	643.035	642.896	635.468	633.725	628.104	623.158	623.707
<b>60</b>	541.125	538.521	532.673	531.360	525.376	523.090	521.151
<b>65</b>	435.958	432.947	426.836	425.491	420.284	418.396	415.969
<b>70</b>	327.624	325.517	322.712	320.425	316.670	312.308	312.124
<b>75</b>	219.653	220.280	216.719	216.571	213.775	207.404	207.832
<b>80</b>	122.718	122.024	120.407	117.679	114.974	112.690	112.137
<b>85</b>	41.434	40.926	40.186	38.018	35.326	35.475	33.752
<b>90</b>	3.257	3.467	3.398	3.059	2.606	2.514	2.358
<b>95</b>	1.990	1.994	2.026	1.934	1.798	1.616	1.514
<b>100</b>	2.035	1.926	1.913	1.777	1.685	1.594	1.558
<b>105</b>	1.945	1.881	1.801	1.709	1.596	1.594	1.469
<b>110</b>	1.855	1.813	1.711	1.575	1.506	1.504	1.469
<b>115</b>	1.764	1.790	1.644	1.597	1.528	1.482	1.514
<b>120</b>	1.900	1.881	1.801	1.687	1.573	1.572	1.558
<b>125</b>	2.035	1.972	1.914	1.777	1.708	1.706	1.736
<b>130</b>	2.035	1.972	1.891	1.844	1.798	1.751	1.735
<b>135</b>	2.035	2.040	1.959	1.957	1.888	1.819	1.779
<b>140</b>	2.352	2.311	2.274	2.182	2.113	2.043	2.046
<b>145</b>	2.759	2.651	2.634	2.587	2.540	2.492	2.536
<b>150</b>	3.347	3.308	3.219	3.194	3.169	3.121	3.025
<b>155</b>	4.026	4.034	3.985	3.959	3.888	3.907	3.826
<b>160</b>	4.795	4.804	4.705	4.679	4.607	4.580	4.582
<b>165</b>	5.473	5.438	5.403	5.376	5.326	5.321	5.250
<b>170</b>	6.061	6.096	6.056	6.029	6.000	5.927	5.828
<b>175</b>	6.604	6.617	6.551	6.523	6.428	6.489	6.318
<b>180</b>	6.755	6.755	6.755	6.755	6.755	6.755	6.755

**Appendix A Product Photo**

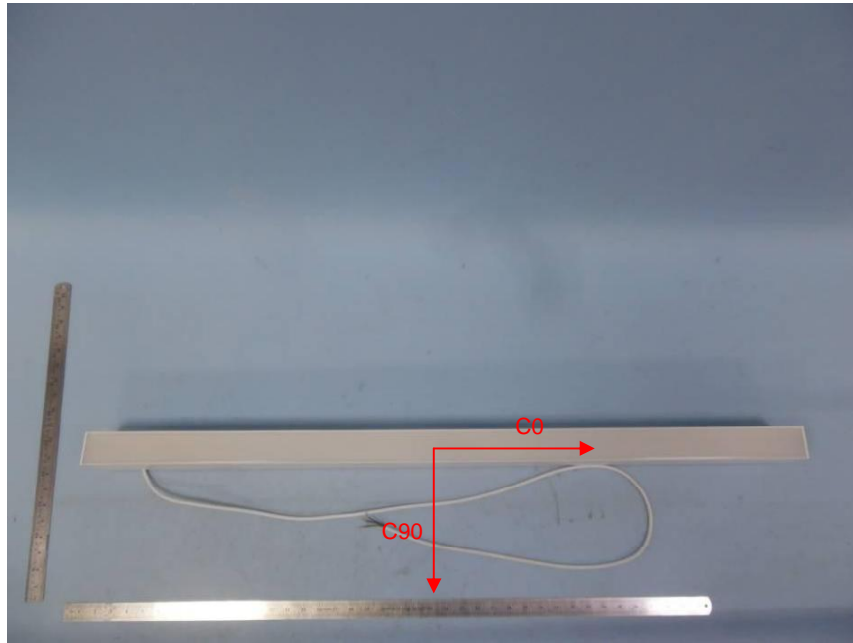

Picture 1

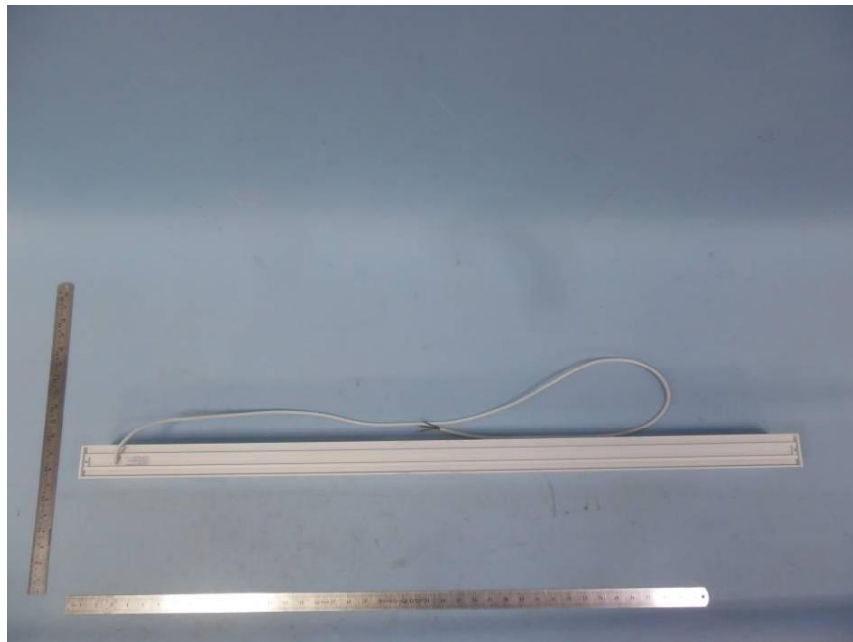

Picture 2

\*\*\*\*End of test report\*\*\*\*